

DIMANCHE 28.2



FRAME

Dimanche 28 Open, 6061 T4-T6 alloy, variable thickness hydroformed tubes, CompactTube integration and internal cable routing

SEATCLAMP

Moustache, alloy, 34.9mm

HEADSET

Acros, AEA-1027, sealed bearings, internal routing

FORK

Dimanche 28, full carbon, tapered steerer tube 1"1/8-1"1/2, FlatMount 160mm direct brake mount, 12x100mm axle, 50mm offset, for tires in 700x45, mounts for mudguard

MOTOR

Bosch, Performance Line SX, 250W, Smart System, 55Nm

BATTERY

Bosch, CompactTube 400Wh, Smart System

CHARGER

Bosch, 2Ah

RIMS

Moustache, al:30, alloy 6061, welded, 24 holes, 700c, 22mm internal width

FRONT HUB

Moustache, 24H, 12x100mm, thru axle

TYRES

Hutchinson, Override, 700x38

REAR HUB

Moustache, 24H, 12x142mm, thru axle

STEM

Moustache, aluminium, suspended 10-20mm travel, 90mm

HANDLEBAR

Moustache, alloy, 680mm, 12mm rise, 9° backsweep, 5° upsweep

GRIPS

SB3, Ergonomic

SADDLE

Selle Royal, VIVO

SEATPOST

Moustache, alloy, 27.2mm, 350mm

CASSETTE

Shimano, CUES, CS-LG300 10-speed, 11-48T

CHAIN

Shimano, LG500, 130 links

REAR DERAILLEUR

Shimano, CUES, RD-U6000-GS, 10/11-speed

SHIFTER

Shimano, CUES, SL-U6000-10R, 10-speed

CRANKS

Moustache, forged aluminium, 165mm

CHAINRING

FSA, Narrow-Wide, 42 teeth, chainguard

PEDALS

alloy platform with reflectors

FRONT BRAKE

Shimano, MT200/UR300, hydraulic disc

FRONT ROTOR

Shimano, 160mm

REAR BRAKE

Shimano, MT200, hydraulic disc

REAR ROTOR

Shimano, 160mm

AUTONOMY

116km

GVWR

120kg

SIZES

XS (1,43 - 1,55m) S (1,53 - 1,68m) M (1,66 - 1,81m)

COLORS

Sand Storm mat

CONDITIONS

Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .

WARRANTY

5 years frame and fork Moustache Bikes - 2 years motor, battery

REMOTE

Bosch, Purion 200, Smart System, compact, color screen, navigation, « Walk assist »

WEIGHT


17.2kg



Scan to find this bike online

{MOUSTACHE

DIMANCHE 28.2

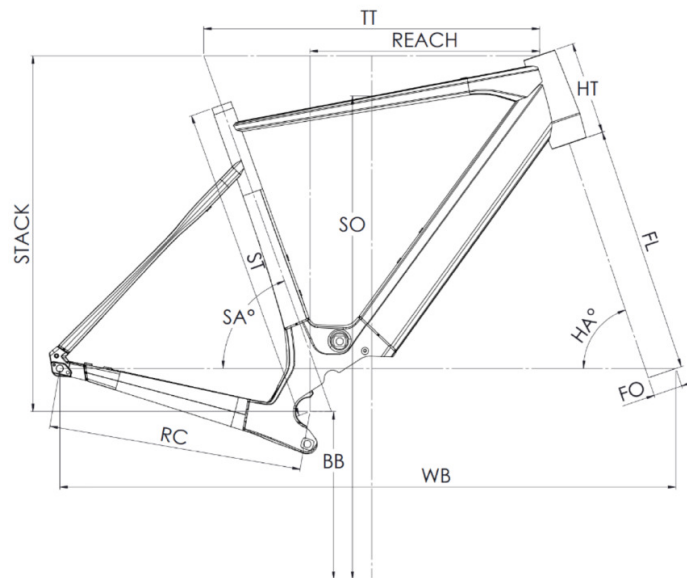

Dimanche 28 Road 2/4/6 - Dimanche 29 Gravel 2/4/6

ST - Taille / Size	mm	460 (S)	500 (M)	540 (L)	580 (XL)
Taille utilisateur / User size	m	1,53 - 1,68	1,66 - 1,81	1,79 - 1,94	1,92 - 2,07
TT - Tube supérieur / Top tube	mm	545	565	585	605
RC - Bases / Rear center	mm	437	437	437	437
HT - Douille de direction / Headtube	mm	120	135	160	180
WB - Empattement / Wheelbase	mm	1039	1049	1061	1071
FL - Longueur de fourche / Fork length	mm	415	415	415	415
BB - Hauteur de boîtier / BB height	mm	288,5	288,5	288,5	288,5
SA - Angle de selle / Seat angle	°	73,3	73	72,8	72,5
HA - Angle de direction / Head angle	°	70	70,7	71,3	72
Reach	mm	375	386	395	405
Stack	mm	569	586	612	634
SO - Enjambement / Standover	mm	772	800	830	850



Scan to find this bike online

{TNOUSTACHE