

SAMEDI 27 XROAD 1




FRAME Xroad, 6061 T4-T6 alloy, variable thickness hydroformed tubes, Bosch PowerTube battery integration (vertical), integrated cable routing	SEATPOST Moustache, alloy, 31.6mm, 350mm	KICKSTAND Moustache, adjustable
SEATCLAMP Moustache, alloy, 34.9mm	CASSETTE Shimano, CS-HG201, 9-speed, 11-36T	AUTONOMY 125km
HEADSET FSA, No 57B-1	CHAIN KMC, X9, 9-speed, 120 links	GVWR 135kg
FORK SR Suntour, XCM ATB, preload adjustment, 80mm travel	REAR DERAILLEUR Shimano, Altus, RD-R2000-SGS, 9-speed	WEIGHT 25.1kg
MOTOR Bosch, Active Line Plus, 250W, 35/50Nm	SHIFTER Shimano, Altus, SL-M2010-R, 9-speed	SIZES S (1,55 - 1,70m) M (1,68 - 1,83m) L (1,80 - 1,95m) XL (1,90 - 2,05m)
BATTERY Bosch, PowerTube 500Wh, vertical	CRANKS Moustache, aluminium, 170mm	COLORS Pastel Green glossy
DISPLAY Bosch, Purion - « Walk assist »	CHAINRING Narrow-Wide, 40 teeth	CONDITIONS Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .
CHARGER Bosch, 2Ah	PEDALS Resin platform with reflectors	WARRANTY 5 years frame and fork Moustache Bikes - 2 years motor, battery
RIMS Moustache, asymmetric, alloy 6061E, welded, 32 holes, 27.5", internal width 23mm	FRONT BRAKE Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake	
FRONT HUB Shimano, 32H, 9x100mm, QR (Quick Release)	FRONT ROTOR Shimano, 180mm or Alhonga, 180mm	
TYRES Hutchinson, Python 2, 27.5x2.10	REAR BRAKE Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake	
REAR HUB Shimano, 32H, 9x135mm, QR (Quick Release)	REAR ROTOR Shimano, 160mm or Alhonga, 160mm	
STEM Moustache, alloy, adjustable, 90mm	FRONT LIGHT AXA, Blueline, 30 lux, powered by main battery	
HANDLEBAR Moustache, ergonomic, alloy, 680mm, 25° backsweep	REAR LIGHT Spanninga, Presto2Guard, powered by main battery	
GRIPS Ergonomic, dual-density	MUDGUARD Moustache, alloy, double wall design, w/alloy stays	
SADDLE Selle Royal, Wave	CARRIER Moustache, alloy, removable QL3 lateral fixation, MIK HD platform	



Scan to find this bike online

MOUSTACHE

SAMEDI 27 XROAD 1

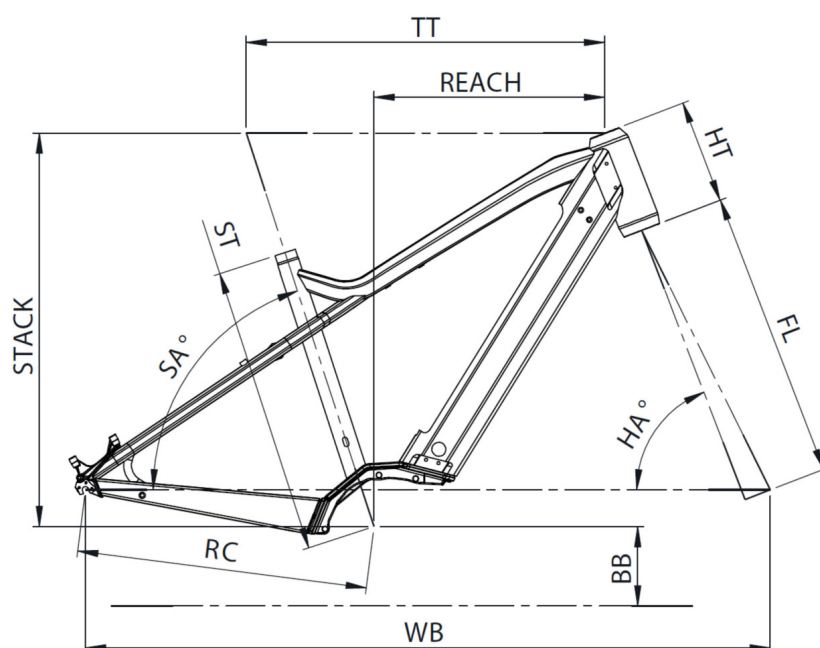

TAILLE - ST	mm	420 (S)	470 (M)	530 (L)	580 (XL)
Taille utilisateur (à titre indicatif)	m	1,55 - 1,70	1,68 - 1,83	1,80 - 1,95	1,90 - 2,05
Tube supérieur (mesure horizontale) - TT	mm	560	585	610	635
Bases - RC	mm	475	475	475	475
Douille de direction - HT	mm	170	170	170	190
Empattement - WB	mm	1108	1123	1148	1174
Longueur de fourche - FL	mm	487	487	487	487
Hauteur boîtier - BB	mm	298	298	298	298
Angle de selle - SA	°	71	71	71	71
Angle de direction - HA	°	67,2	68	68	68
Reach	mm	341	365	390	409
Stack	mm	644	648	648	667



Scan to find this bike online

TOUSTACHE