

DIMANCHE 28.4



FRAME

Dimanche 28 Open, 6061 T4-T6 alloy, variable thickness hydroformed tubes, CompactTube integration and internal cable routing

SEATCLAMP

Moustache, alloy, 34.9mm

HEADSET

Acros, AEA-1027, sealed bearings, internal routing

FORK

Dimanche 28, full carbon, tapered steerer tube 1"1/8-1"1/2, FlatMount 160mm direct brake mount, 12x100mm axle, 50mm offset, for tires in 700x45, mounts for mudguard

MOTOR

Bosch, Performance Line SX, 250W, Smart System, 55Nm

BATTERY

Bosch, CompactTube 400Wh, Smart System

DISPLAY

Bosch, Kiox 300, Smart System, compact, color screen, customizable screens, Lock function (optional), « Walk assist »

CHARGER

Bosch, 2Ah

TYRES

Schwalbe, Pro One, 700x34C, SuperRace, TLE

STEM

Moustache, 3D forged Aluminum, 70mm

HANDLEBAR

Moustache, alloy, Road, drop 105, reach 65, flare 20°, 440mm

GRIPS

Moustache bar tape

SADDLE

Selle Royal, SRX

SEATPOST

Moustache, alloy, 27.2mm, 350mm

CASSETTE

SRAM, XPLR, PG-1231 12-speed, 11-44T

CHAIN

Sram, Apex, 12-speed, 120 links

REAR DERAILLEUR

SRAM, Apex XPLR, 12-speed

CRANKS

FSA, forged aluminum, 165mm

CHAINRING

SRAM, Narrow-Wide, 44 teeth, chainguard

PEDALS

alloy platform with reflectors

FRONT BRAKE

SRAM, Apex, hydraulic disc

FRONT ROTOR

SRAM, Paceline, 160mm

REAR BRAKE

SRAM, Apex, hydraulic disc

REAR ROTOR

SRAM, Paceline, 160mm

AUTONOMY

116km

GVWR

120kg

CONDITIONS

Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .

WARRANTY

5 years frame and fork Moustache Bikes - 2 years motor, battery

RIMS

Moustache, al:30, alloy 6061, welded, 24 holes, 700c, 22mm internal width

FRONT HUB

Moustache, 24H, 12x100mm, thru axle

REAR HUB

Moustache, 24H, 12x142mm, thru axle

SIZES

XS (1,43 - 1,55m) S (1,53 - 1,68m) M (1,66 - 1,81m)

COLORS

Pebble grey glossy

REMOTE

Bosch, System Controller and Mini Remote, Smart System, integrated in the top tube, range and assistance mode

WEIGHT


16.2kg



Scan to find this bike online

{MOUSTACHE

DIMANCHE 28.4

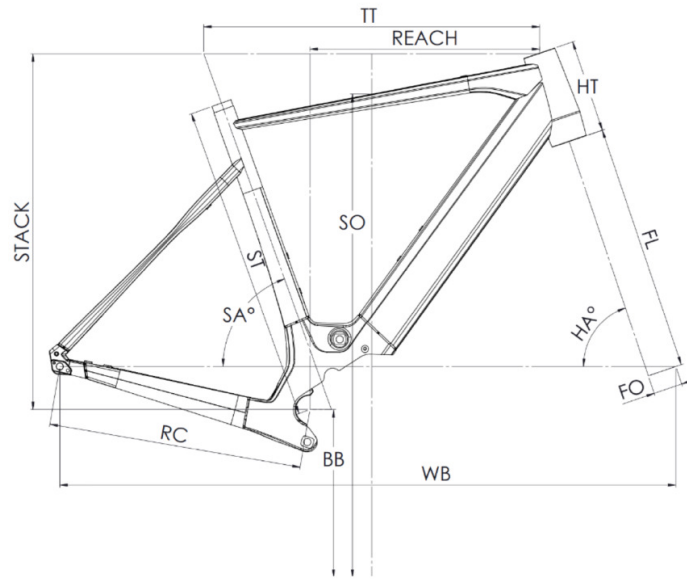

Dimanche 28 Road 2/4/6 - Dimanche 29 Gravel 2/4/6

| ST - Taille / Size | mm | 460 (S) | 500 (M) | 540 (L) | 580 (XL) |
|--|----|-------------|-------------|-------------|-------------|
| Taille utilisateur / User size | m | 1,53 - 1,68 | 1,66 - 1,81 | 1,79 - 1,94 | 1,92 - 2,07 |
| TT - Tube supérieur / Top tube | mm | 545 | 565 | 585 | 605 |
| RC - Bases / Rear center | mm | 437 | 437 | 437 | 437 |
| HT - Douille de direction / Headtube | mm | 120 | 135 | 160 | 180 |
| WB - Empattement / Wheelbase | mm | 1039 | 1049 | 1061 | 1071 |
| FL - Longueur de fourche / Fork length | mm | 415 | 415 | 415 | 415 |
| BB - Hauteur de boîtier / BB height | mm | 288,5 | 288,5 | 288,5 | 288,5 |
| SA - Angle de selle / Seat angle | ° | 73,3 | 73 | 72,8 | 72,5 |
| HA - Angle de direction / Head angle | ° | 70 | 70,7 | 71,3 | 72 |
| Reach | mm | 375 | 386 | 395 | 405 |
| Stack | mm | 569 | 586 | 612 | 634 |
| SO - Enjambement / Standover | mm | 772 | 800 | 830 | 850 |



Scan to find this bike online

{TROUSTACHE