

SAMEDI 28.2




FRAME Samedi 28, 6061 T4-T6 alloy, variable thickness hydroformed tubes, Bosch PowerTube battery integration (Vertical), integrated cable routing	CASSETTE Shimano, CS-HG201, 9-speed, 11-36T	AUTONOMY 108km
SEATCLAMP Moustache, alloy, 34.9mm	CHAIN KMC, X9, 9-speed, 120 links	GVWR 135kg
HEADSET FSA, No 57B-1	REAR DERAILLEUR Shimano, Altus, RD-R2000-SGS, 9-speed	WEIGHT 24.8kg
FORK SR Suntour, NEX-E25, 63mm travel	SHIFTER Shimano, Altus, SL-M2010-R, 9-speed	SIZES S (1,55 - 1,70m) M (1,68 - 1,83m) L (1,80 - 1,95m) XL (1,90 - 2,05m)
MOTOR Bosch, Active Line Plus, 250W, 35/50Nm	CRANKS Moustache, aluminium, 170mm	COLORS Deep blue glossy
BATTERY Bosch, PowerTube 400Wh, vertical	CHAINRING Narrow-Wide, 40 teeth	CONDITIONS Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .
DISPLAY Bosch, Purion - « Walk assist »	PEDALS Resin platform with reflectors	WARRANTY 5 years frame and fork Moustache Bikes - 2 years motor, battery
CHARGER Bosch, 4Ah	FRONT BRAKE Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake	
RIMS Moustache, asymmetric, alloy 6061E, welded, 32 holes, 28", internal width 23mm	FRONT ROTOR Shimano, 180mm or Alhonga, 180mm	
FRONT HUB Shimano, 32H, 9x100mm, QR (Quick Release)	REAR BRAKE Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake	
TYRES Schwalbe, Big Apple, 700x50C	REAR ROTOR Shimano, 160mm or Alhonga, 160mm	
REAR HUB Shimano, 32H, 9x135mm, QR (Quick Release)	FRONT LIGHT AXA, Blueline, 30 lux, powered by main battery	
HANDLEBAR Moustache, ergonomic, alloy, 80mm rise	REAR LIGHT Spanninga, Presto2Guard, powered by main battery	
GRIPS Ergonomic, dual-density	MUDGUARD Moustache, alloy, double wall design, w/alloy stays	
SADDLE Selle Royal, Wave	CARRIER Moustache, alloy, removable QL3 lateral fixation, MIK HD platform	
SEATPOST Suspension, alloy, 31.6mm, 350mm, 40mm travel	KICKSTAND Moustache, adjustable	



Scan to find this bike online

{MOUSTACHE

SAMEDI 28.2

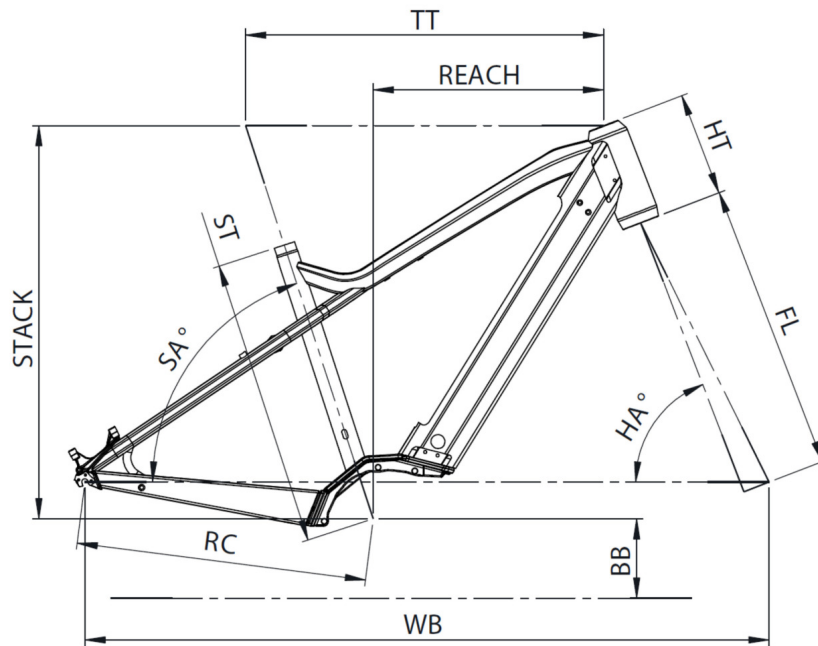

TAILLE - ST	mm	420 (S)	470 (M)	530 (L)	580 (XL)
Taille utilisateur (à titre indicatif)	m	1,55 - 1,70	1,68 - 1,83	1,80 - 1,95	1,90 - 2,05
Tube supérieur (mesure horizontale) - TT	mm	560	585	610	635
Bases - RC	mm	475	475	475	475
Douille de direction - HT	mm	170	170	170	190
Empattement - WB	mm	1106	1121	1147	1173
Longueur de fourche - FL	mm	477	477	477	477
Hauteur boîtier - BB	mm	305	305	305	305
Angle de selle - SA	°	71,5	71,5	71,5	71,5
Angle de direction - HA	°	67,7	68,5	68,5	68,5
Reach	mm	347	371	396	415
Stack	mm	644	644	644	664



Scan to find this bike online

TOUSTACHE