

SAMEDI 28.1



FRAME

Samedi 28, 6061 T4-T6 alloy, variable thickness extruded tubes, headtube 1"1/8

SEATCLAMP

Moustache, alloy, 31.8mm

HEADSET

FSA, No 10P

FORK

SR Suntour, NEX-E25, 63mm travel

MOTOR

Bosch, Active Line, 250W, 40Nm

BATTERY

Bosch, PowerPack 400Wh

DISPLAY

Bosch, Purion - « Walk assist »

CHARGER

Bosch, 2Ah

RIMS

Moustache, asymmetric, alloy 6061E, welded, 32 holes, 28", internal width 23mm

FRONT HUB

Shimano, 32H, 9x100mm, QR (Quick Release)

TYRES

Schwalbe, Impac Streetpac, 700x47C or Schwalbe, Road cruiser K-Guard, 700x45C

REAR HUB

Shimano, 32H, 9x135mm, QR (Quick Release)

HANDLEBAR

Moustache, ergonomic, alloy, 80mm rise

GRIPS

Ergonomic, dual-density

SADDLE

Selle Royal, Wave

SEATPOST

Moustache, alloy, 31.6mm, 350mm

CASSETTE

Shimano, CS-HG201, 9-speed, 11-36T

CHAIN

KMC, X9, 9-speed, 120 links

REAR DERAILLEUR

Shimano, Altus, RD-R2000-SGS, 9-speed

SHIFTER

Shimano, Altus, SL-M2010-R, 9-speed

CRANKS

Moustache, aluminium, 170mm

CHAINRING

Narrow-Wide, 40 teeth

PEDALS

Resin platform with reflectors

FRONT BRAKE

Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake

FRONT ROTOR

Shimano, 180mm or Alhonga, 180mm

REAR BRAKE

Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake

REAR ROTOR

Shimano, 160mm or Alhonga, 160mm

FRONT LIGHT

AXA, Blueline, 30 lux, powered by main battery

REAR LIGHT

Spanninga, Presto2Guard, powered by main battery

MUDGUARD

Moustache, alloy, double wall design, w/alloy stays

CARRIER

Moustache, alloy, removable QL3 lateral fixation

KICKSTAND

Moustache, adjustable

AUTONOMY

108km

GVWR

135kg

WEIGHT

22.8kg

SIZES

S (1,55 - 1,70m) M (1,68 - 1,83m) L (1,80 - 1,95m) XL (1,90 - 2,05m)

COLORS

Black mat

CONDITIONS

Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .

WARRANTY


5 years frame and fork Moustache Bikes - 2 years motor, battery



Scan to find this bike online

{MOUSTACHE

SAMEDI 28.1

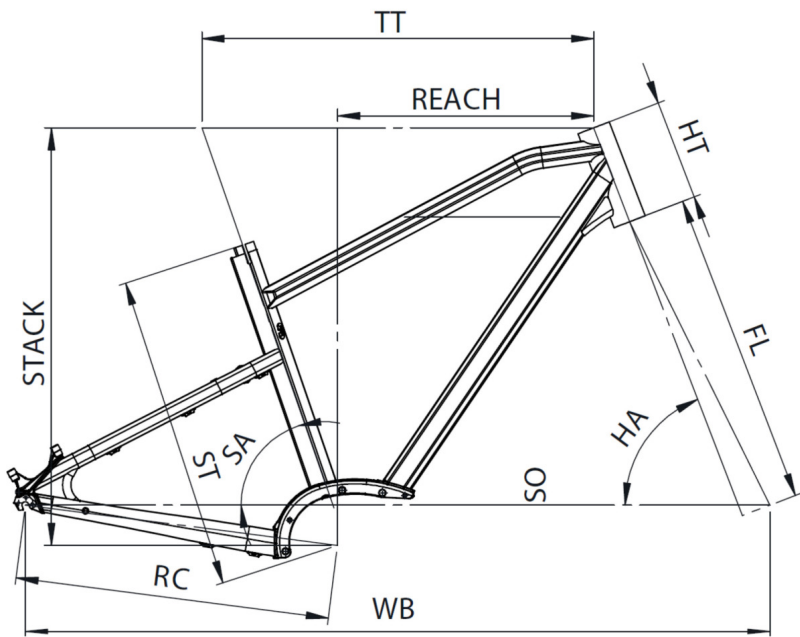

TAILLE - ST	mm	410 (S)	470 (M)	530 (L)	590 (XL)
Taille utilisateur (à titre indicatif)	m	1,55 - 1,70	1,66 - 1,83	1,81 - 1,95	1,90 - 2,05
Tube supérieur (mesure horizontale) - TT	mm	560	585	610	635
Bases - RC	mm	470	470	470	470
Douille de direction - HT	mm	140	150	170	180
Empattement - WB	mm	1092	1112	1132	1158
Longueur de fourche - FL	mm	467	467	467	467
Hauteur boîtier - BB	mm	60	60	60	60
Angle de selle - SA	°	72	72	72	72
Angle de direction - HA	°	68,5	69	69,5	69,5
Reach	mm	361	383	400	423
Stack	mm	610	623	644	653



Scan to find this bike online