

# SAMEDI 28.1 OPEN



## FRAME

Samedi 28 Open, 6061 T4-T6 alloy, variable thickness extruded tubes, headtube 1"1/8

## SEATCLAMP

Moustache, alloy, 31.8mm

## HEADSET

FSA, No 10P

## FORK

SR Suntour, NEX-E25, 63mm travel

## MOTOR

Bosch, Active Line, 250W, 40Nm

## BATTERY

Bosch, PowerPack 400Wh

## DISPLAY

Bosch, Purion - « Walk assist »

## CHARGER

Bosch, 2Ah

## RIMS

Moustache, asymmetric, alloy 6061E, welded, 32 holes, 28", internal width 23mm

## FRONT HUB

Shimano, 32H, 9x100mm, QR (Quick Release)

## TYRES

Schwalbe, Impac Streetpac, 700x47c

## REAR HUB

Shimano, 32H, 9x135mm, QR (Quick Release)

## HANDLEBAR

Moustache, ergonomic, alloy, 80mm rise

## GRIPS

Ergonomic, dual-density

## SADDLE

Selle Royal, Wave

## SEATPOST

Moustache, alloy, 31.6mm, 350mm

## CASSETTE

Shimano, CS-HG201, 9-speed, 11-36T

## CHAIN

KMC, X9, 9-speed, 120 links

## REAR DERAILLEUR

Shimano, Altus, RD-R2000-SGS, 9-speed

## SHIFTER

Shimano, Altus, SL-M2010-R, 9-speed

## CRANKS

Moustache, aluminium, 170mm

## CHAINRING

Narrow-Wide, 40 teeth

## PEDALS

Resin platform with reflectors

## FRONT BRAKE

Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake

## FRONT ROTOR

Shimano, 180mm or Alhonga, 180mm

## REAR BRAKE

Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake

## REAR ROTOR

Shimano, 160mm or Alhonga, 160mm

## FRONT LIGHT

AXA, Blueline, 30 lux, powered by main battery

## REAR LIGHT

Spanninga, Presto2Guard, powered by main battery

## MUDGUARD

Moustache, alloy, double wall design, w/alloy stays

## CARRIER

Moustache, alloy, removable QL3 lateral fixation

## KICKSTAND

Moustache, adjustable

## AUTONOMY

108km

## GVWR

135kg

## WEIGHT

22.8kg

## SIZES

S (1,49 - 1,61m) M (1,59 - 1,76m) L (1,74 - 1,90m)

## COLORS

Black mat

## CONDITIONS

Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .

## WARRANTY


5 years frame and fork Moustache Bikes - 2 years motor, battery



Scan to find this bike online

**{MOUSTACHE**

# SAMEDI 28.1 OPEN

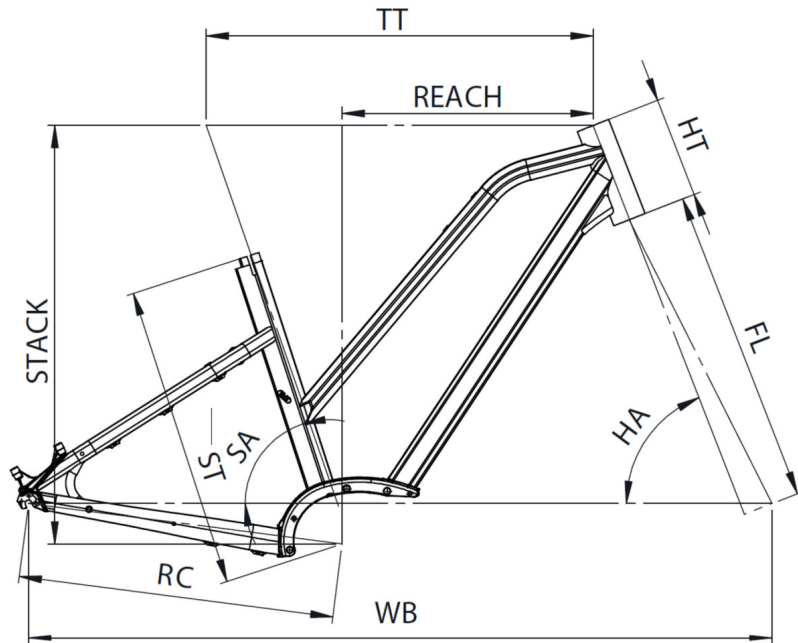

TAILLE - ST	mm	390 (S)	450 (M)	510 (L)
Taille utilisateur (à titre indicatif)	m	1,49 - 1,61	1,59 - 1,76	1,74 - 1,90
Tube supérieur (mesure horizontale) - TT	mm	550	575	600
Bases - RC	mm	470	470	470
Douille de direction - HT	mm	140	150	160
Empattement - WB	mm	1088	1105	1124
Longueur de fourche - FL	mm	467	467	467
Hauteur boîtier - BB	mm	60	60	60
Angle de selle - SA	°	72,3	72	72
Angle de direction - HA	°	68,3	68,7	69,3
Reach	mm	355	373	394
Stack	mm	611	622	634



Scan to find this bike online

**TOUSTACHE**