

SAMEDI 28.1 OPEN




FRAME Samedi 28 Open, 6061 T4-T6 alloy, variable thickness extruded tubes, headtube 1"1/8	CASSETTE Shimano, CS-HG201, 9-speed, 11-36T	AUTONOMY 108km
SEATCLAMP Moustache, alloy, 31.8mm	CHAIN KMC, X9, 9-speed, 120 links	GVWR 135kg
HEADSET FSA, No 10P	REAR DERAILLEUR Shimano, Altus, RD-R2000-SGS, 9-speed	WEIGHT 22.8kg
FORK SR Suntour, NEX-E25, 63mm travel	SHIFTER Shimano, Altus, SL-M2010-R, 9-speed	SIZES S (1,49 - 1,61m) M (1,59 - 1,76m) L (1,74 - 1,90m)
MOTOR Bosch, Active Line, 250W, 40Nm	CRANKS Moustache, aluminium, 170mm	COLORS Black mat
BATTERY Bosch, PowerPack 400Wh	CHAINRING Narrow-Wide, 40 teeth	CONDITIONS Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .
DISPLAY Bosch, Purion - « Walk assist »	PEDALS Resin platform with reflectors	WARRANTY 5 years frame and fork Moustache Bikes - 2 years motor, battery
CHARGER Bosch, 2Ah	FRONT BRAKE Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake	
RIMS Moustache, asymmetric, alloy 6061E, welded, 32 holes, 28", internal width 23mm	FRONT ROTOR Shimano, 180mm or Alhonga, 180mm	
FRONT HUB Shimano, 32H, 9x100mm, QR (Quick Release)	REAR BRAKE Shimano, MT200 or Alhonga HJ-472, hydraulic disc brake	
TYRES Schwalbe, Impac Streetpac, 700x47C or Schwalbe, Road cruiser K-Guard, 700x45C	REAR ROTOR Shimano, 160mm or Alhonga, 160mm	
REAR HUB Shimano, 32H, 9x135mm, QR (Quick Release)	FRONT LIGHT AXA, Blueline, 30 lux, powered by main battery	
HANDLEBAR Moustache, ergonomic, alloy, 80mm rise	REAR LIGHT Spanninga, Presto2Guard, powered by main battery	
GRIPS Ergonomic, dual-density	MUDGUARD Moustache, alloy, double wall design, w/alloy stays	
SADDLE Selle Royal, Wave	CARRIER Moustache, alloy, removable QL3 lateral fixation	
SEATPOST Moustache, alloy, 31.6mm, 350mm	KICKSTAND Moustache, adjustable	



Scan to find this bike online

{MOUSTACHE

SAMEDI 28.1 OPEN

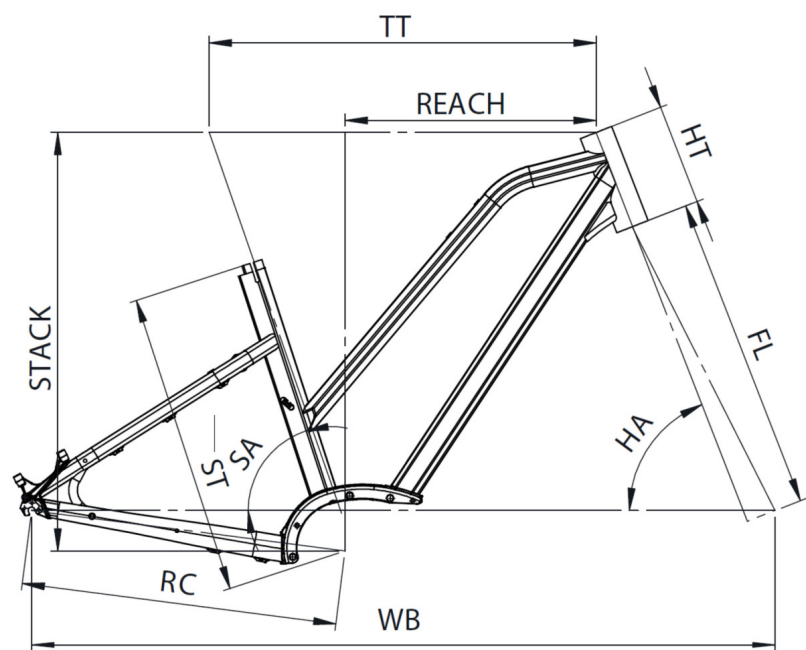

TAILLE - ST	mm	390 (S)	450 (M)	510 (L)
Taille utilisateur (à titre indicatif)	m	1,49 - 1,61	1,59 - 1,76	1,74 - 1,90
Tube supérieur (mesure horizontale) - TT	mm	550	575	600
Bases - RC	mm	470	470	470
Douille de direction - HT	mm	140	150	160
Empattement - WB	mm	1088	1105	1124
Longueur de fourche - FL	mm	467	467	467
Hauteur boîtier - BB	mm	60	60	60
Angle de selle - SA	°	72,3	72	72
Angle de direction - HA	°	68,3	68,7	69,3
Reach	mm	355	373	394
Stack	mm	611	622	634



Scan to find this bike online