

DIMANCHE 29.6



PEDALS

alloy platform with reflectors

SIZES

S

COLORS

Fir Green glossy

WEIGHT

17.6kg

FRAME

Dimanche 29, 6061 T4-T6 alloy, variable thickness hydroformed tubes, CompactTube integration and internal cable routing

GVWR

120kg

FORK

Dimanche 29, full carbon, tapered steerer tube 1"1/8-1"1/2 - FlatMount 180mm direct brake mount - 12x100mm Axle - 50mm offset - For tires in 700x50 - Mounts for mud-guard and luggage racks

WARRANTY

5 years frame and fork Moustache Bikes - 2 years motor, battery

MOTOR

Bosch, Performance Line SX, 250W, Smart System, 55Nm

BATTERY

Bosch, CompactTube 400Wh, Smart System

AUTONOMY

90km

CHARGER

Bosch, 2Ah

DISPLAY

Bosch, Kiox 300, Smart System, compact, color screen, customizable screens, Lock function (optional), « Walk assist »

REMOTE

Bosch, System Controller and Mini Remote, Smart System, integrated in the top tube, range and assistance mode

REAR DERAILLEUR

SRAM, X1 AXS, 12-speed, electronic

CHAINRING

SRAM, Narrow-Wide, 44 teeth, chainguard

CASSETTE

SRAM, Eagle, PG-1230 12-speed, 11-50T

CHAIN

Sram, SX Eagle, 12-speed, 120 links

CRANKS

FSA, forged aluminum, 165mm

FRONT BRAKE

SRAM, Apex AXS, hydraulic disc

REAR BRAKE

SRAM, Apex AXS, hydraulic disc

FRONT ROTOR

SRAM, Paceline, 160mm

REAR ROTOR

SRAM, Paceline, 160mm

FRONT HUB

Mavic, 24 trous, 12x100mm, thru axle

REAR HUB

Mavic, 24 trous, ID360, 12x142mm, thru axle

RIMS

Mavic, Allroad S, alloy, 24H, 700c, 25mm width, Tubeless compatible

TYRES

Maxxis, Rambler, 700x50C, Tanwall

SADDLE

Selle Royal, VIVO

SEATPOST

EXA, 860i, suspended dropper-post w/remote lever, 31.6mm, 75mm

SEATCLAMP

Moustache, alloy, 34.9mm

HANDLEBAR

Moustache, alloy, Gravel, drop 105, reach 65, flare 20°, 500mm

STEM

Moustache, aluminium, suspended 10-20mm travel, 70mm

HEADSET

Acros, AZF-725, sealed bearings, internal routing

GRIPS


Moustache bar tape



Scan to find this bike online

{MOUSTACHE

DIMANCHE 29.6

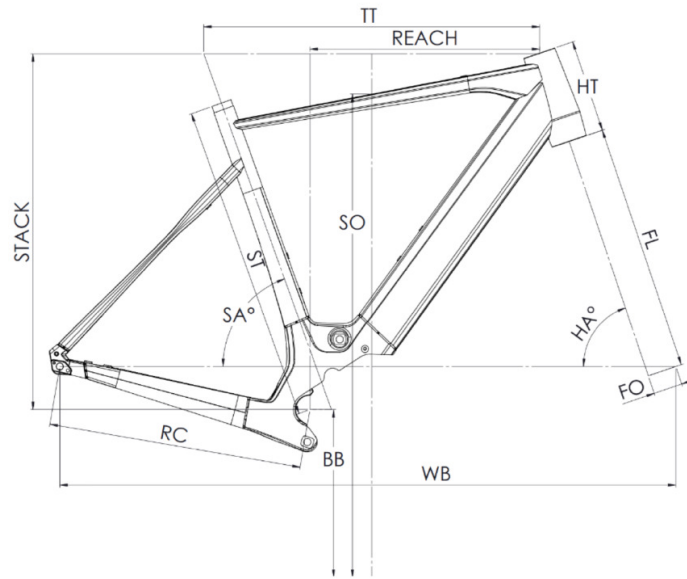

Dimanche 28 Road 2/4/6 - Dimanche 29 Gravel 2/4/6

ST - Taille / Size	mm	460 (S)	500 (M)	540 (L)	580 (XL)
Taille utilisateur / User size	m	1,53 - 1,68	1,66 - 1,81	1,79 - 1,94	1,92 - 2,07
TT - Tube supérieur / Top tube	mm	545	565	585	605
RC - Bases / Rear center	mm	437	437	437	437
HT - Douille de direction / Headtube	mm	120	135	160	180
WB - Empattement / Wheelbase	mm	1039	1049	1061	1071
FL - Longueur de fourche / Fork length	mm	415	415	415	415
BB - Hauteur de boîtier / BB height	mm	288,5	288,5	288,5	288,5
SA - Angle de selle / Seat angle	°	73,3	73	72,8	72,5
HA - Angle de direction / Head angle	°	70	70,7	71,3	72
Reach	mm	375	386	395	405
Stack	mm	569	586	612	634
SO - Enjambement / Standover	mm	772	800	830	850



Scan to find this bike online

{TROUSTACHE