

# DIMANCHE 28

## ROAD 4

D84ONM400260



Product specifications may change without notice. Non-contractual information.

|                                                                                                                                                                                     |                                                                                               |                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>FRAME</b><br>Dimanche 28 Open, 6061 T4-T6 alloy, variable thickness hydroformed tubes, CompactTube integration and internal cable routing                                        | <b>CHAIN</b><br>Sram, Apex, 12-speed, 120 links                                               | <b>GRIPS</b><br>Moustache bar tape, gel 2.5mm                                      |
| <b>FORK</b><br>Dimanche 28, full carbon, tapered steerer tube 1"1/8-1"1/2, FlatMount 160mm direct brake mount, 12x100mm axle, 50mm offset, for tires in 700x45, mounts for mudguard | <b>CRANKS</b><br>FSA, forged aluminum, 170mm                                                  | <b>SADDLE</b><br>Selle Royal, SRX                                                  |
| <b>MOTOR</b><br>Bosch, Performance Line SX, Smart System, 60Nm                                                                                                                      | <b>FRONT BRAKE</b><br>SRAM, Apex, hydraulic disc                                              | <b>SEATPOST</b><br>Moustache, alloy, 27.2mm, 350mm                                 |
| <b>BATTERY</b><br>Bosch, CompactTube 400Wh, Smart System                                                                                                                            | <b>REAR BRAKE</b><br>SRAM, Apex, hydraulic disc                                               | <b>SEATCLAMP</b><br>Moustache, alloy, 34.9mm                                       |
| <b>CONDITIONS</b><br>Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .                                                               | <b>FRONT ROTOR</b><br>SRAM, Paceline, 160mm                                                   | <b>FRONT LIGHT</b><br>-                                                            |
| <b>CHARGER</b><br>Bosch, 2Ah                                                                                                                                                        | <b>REAR ROTOR</b><br>SRAM, Paceline, 160mm                                                    | <b>PEDALS</b><br>alloy platform with reflectors                                    |
| <b>DISPLAY</b><br>Bosch, Kiox 300, Smart System                                                                                                                                     | <b>FRONT HUB</b><br>Moustache, 24H, 12x100mm, thru axle                                       | <b>SIZE</b><br>M                                                                   |
| <b>REMOTE</b><br>Bosch, System Controller and Mini Remote, Smart System                                                                                                             | <b>REAR HUB</b><br>Moustache, 24H, 12x142mm, thru axle                                        | <b>COLOR</b><br>Black glossy                                                       |
| <b>BCM</b><br>Not equipped with Bosch ConnectModule                                                                                                                                 | <b>FRONT RIM</b><br>Moustache, al:30, alloy 6061, welded, 24 holes, 700c, 22mm internal width | <b>WEIGHT</b><br>16.2 kg                                                           |
| <b>RANGE AUTONOMY</b><br>116 km                                                                                                                                                     | <b>REAR RIM</b><br>Moustache, al:30, alloy 6061, welded, 24 holes, 700c, 22mm internal width  | <b>GVWR</b><br>120 kg                                                              |
| <b>REAR DERAILLEUR</b><br>SRAM, Apex XPLR, 12-speed                                                                                                                                 | <b>FRONT TYRE</b><br>Schwalbe, Pro One, 700x34C, SuperRace, TLE                               | <b>WARRANTY</b><br>5 years frame and fork Moustache Bikes - 2 years motor, battery |
| <b>CHAINRING</b><br>SRAM, Narrow-Wide, 44 teeth, chainguard                                                                                                                         | <b>REAR TYRE</b><br>Schwalbe, Pro One, 700x34C, SuperRace, TLE                                |                                                                                    |
| <b>CASSETTE</b><br>SRAM, XPLR, PG-1231 12-speed, 11-44T                                                                                                                             | <b>HANDLEBAR</b><br>Moustache, alloy, rise 10, drop 129, reach 65, flare 16°, 420mm           |                                                                                    |
|                                                                                                                                                                                     | <b>STEM</b><br>Moustache, 3D forged Aluminum, 70mm                                            |                                                                                    |
|                                                                                                                                                                                     | <b>HEADSET</b><br>Acros, AZF-725, sealed bearings, internal routing                           |                                                                                    |




Find this bike online

{MOUSTACHE

# DIMANCHE 28

## ROAD 4

D84ONM400260

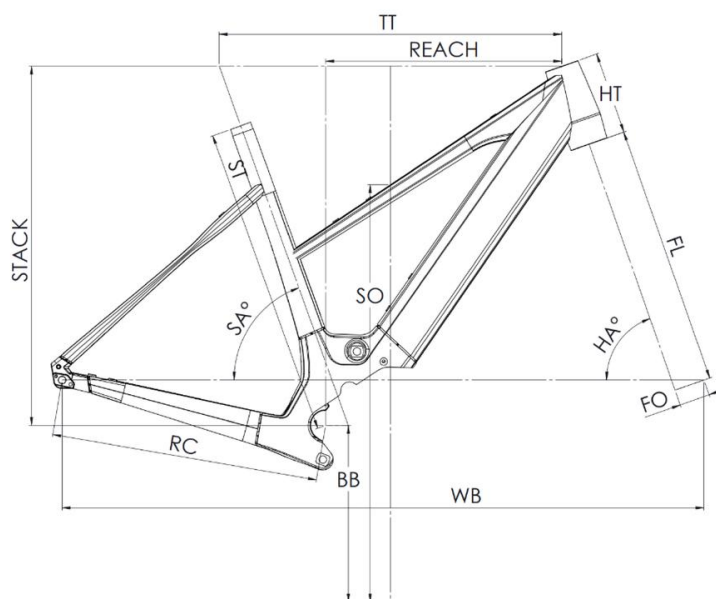

### Dimanche 28 Road 2/4 Open - Dimanche 29 Gravel 2/4 Open

| ST - Taille / Size                     | mm | 430 (XS)    | 460 (S)     | 500 (M)     |
|----------------------------------------|----|-------------|-------------|-------------|
| Taille utilisateur / User size         | m  | 1,43 - 1,55 | 1,53 - 1,68 | 1,66 - 1,81 |
| TT - Tube supérieur / Top tube         | mm | 535         | 545         | 565         |
| RC - Bases / Rear center               | mm | 437         | 437         | 437         |
| HT - Douille de direction / Headtube   | mm | 120         | 120         | 135         |
| WB - Empattement / Wheelbase           | mm | 1039        | 1039        | 1049        |
| FL - Longueur de fourche / Fork length | mm | 415         | 415         | 415         |
| BB - Hauteur de boîtier / BB height    | mm | 288,5       | 288,5       | 288,5       |
| SA - Angle de selle / Seat angle       | °  | 73,6        | 73,3        | 73          |
| HA - Angle de direction / Head angle   | °  | 69,3        | 70          | 70,7        |
| Reach                                  | mm | 369         | 375         | 386         |
| Stack                                  | mm | 566         | 569         | 586         |
| SO - Enjambement / Standover           | mm | 662         | 664         | 680         |



Find this bike online

{NOUSTACHE