

# LUNDI 27.6

## 2025

L76ORU500250



Product specifications may change without notice. Non-contractual information.

|                                                                                                                                                                                                                         |                                                                                                      |                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| <b>FRAME</b><br>Lundi 27 low step-over, 6061 T4-T6 alloy, hydroformed and extruded triple cavity tubes for optimal stiffness. Exclusive integration of the Bosch PowerTube battery (Vertical), integrated cable routing | <b>SHIFTER</b><br>Enviolo, PURE, rotating handle with visual indicator                               | <b>SADDLE</b><br>Selle Royal, Hertz, gel                                                           |
| <b>FORK</b><br>Lundi, alloy w/integrated cable routing and custom front carrier attachments                                                                                                                             | <b>CRANKS</b><br>Moustache, aluminium, 170mm moteur Gen3                                             | <b>SEATPOST</b><br>Suspension, alloy, 31.6mm, 350mm, 40mm travel                                   |
| <b>MOTOR</b><br>Bosch, Performance Line BDU33, Smart System, 75Nm                                                                                                                                                       | <b>FRONT BRAKE</b><br>Shimano, MT200, hydraulic disc                                                 | <b>SEATCLAMP</b><br>Moustache, alloy, 34.9mm                                                       |
| <b>BATTERY</b><br>Bosch, PowerTube 500Wh, vertical, Smart System                                                                                                                                                        | <b>REAR BRAKE</b><br>Shimano, MT200, hydraulic disc                                                  | <b>FRONT LIGHT</b><br>Spanninga, integrated, 30 lux, powered by main battery                       |
| <b>CONDITIONS</b><br>Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .                                                                                                   | <b>FRONT ROTOR</b><br>Shimano, 180mm                                                                 | <b>REAR LIGHT</b><br>Spanninga, Presto2Guard, powered by main battery                              |
| <b>CHARGER</b><br>Bosch, 2Ah                                                                                                                                                                                            | <b>REAR ROTOR</b><br>Shimano, 160mm                                                                  | <b>LOCK</b><br>AXA, Block XXL, same key for framelock & battery lock                               |
| <b>DISPLAY</b><br>Bosch, Kiox 300, Smart System                                                                                                                                                                         | <b>FRONT HUB</b><br>Shimano, 32H, 9x100mm, QR (Quick Release)                                        | <b>KICKSTAND</b><br>Moustache, adjustable                                                          |
| <b>REMOTE</b><br>Bosch, LED remote Bluetooth                                                                                                                                                                            | <b>REAR HUB</b><br>Enviolo, City 320%, 32H                                                           | <b>MUDGUARD</b><br>Moustache, alloy, double wall design, w/alloy stays                             |
| <b>BCM</b><br>Not equipped with Bosch ConnectModule                                                                                                                                                                     | <b>FRONT RIM</b><br>Moustache, asymmetric, alloy 6061E, welded, 32 holes, 27.5", internal width 23mm | <b>CARRIER</b><br>Moustache, alloy, removable QL3 lateral fixation, MIK HD platform                |
| <b>RANGE AUTONOMY</b><br>115 km                                                                                                                                                                                         | <b>REAR RIM</b><br>Moustache, asymmetric, alloy 6061E, welded, 32 holes, 27.5", internal width 23mm  | <b>FRONT CARRIER</b><br>Optional extra: Moustache, Alloy, compatible with MIK bags and accessories |
| <b>REAR DERAILLEUR</b><br>Moustache, eccentric idler tensioner                                                                                                                                                          | <b>FRONT TYRE</b><br>Schwalbe, Super Moto-X, 27.5x2.40                                               | <b>PEDALS</b><br>alloy platform with reflectors                                                    |
| <b>CHAINRING</b><br>Gates, 50T                                                                                                                                                                                          | <b>REAR TYRE</b><br>Schwalbe, Super Moto-X, 27.5x2.40                                                | <b>SIZE</b><br>TU                                                                                  |
| <b>CASSETTE</b><br>Gates, 24T                                                                                                                                                                                           | <b>HANDLEBAR</b><br>Moustache, Lundi custom ergonomic, alloy                                         | <b>COLOR</b><br>Terracotta glossy                                                                  |
| <b>CHAIN</b><br>Gates, CDX belt, clean, smooth and resistant                                                                                                                                                            | <b>HEADSET</b><br>FSA, No 28/41 integrated                                                           | <b>WEIGHT</b><br>27.6 kg                                                                           |
|                                                                                                                                                                                                                         | <b>GRIPS</b><br>Ergonomic, dual-density                                                              | <b>GVWR</b><br>150 kg                                                                              |

# LUNDI 27.6

## 2025

L76ORU500250



### WARRANTY

5 years frame and fork Moustache Bikes - 2 years  
motor, battery




Find this bike online

{MOUSTACHE

# LUNDI 27.6

## 2025

L76ORU500250

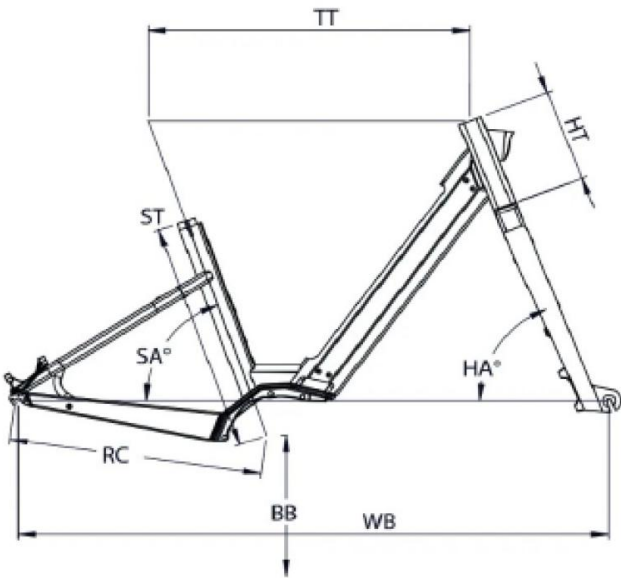

### Lundi 27 ES / 27.3 / 27.4

|                                      |    |             |
|--------------------------------------|----|-------------|
| ST - Taille / Size                   | mm | 460         |
| Taille utilisateur / User size       | m  | 1,57 - 1,90 |
| TT - Tube supérieur / Top tube       | mm | 615         |
| RC - Bases / Rear center             | mm | 480         |
| HT - Douille de direction / Headtube | mm | 185         |
| WB - Empattement / Wheelbase         | mm | 1129        |
| BB - Hauteur de boîtier / BB height  | mm | 285         |
| SA - Angle de selle / Seat angle     | °  | 70,4        |
| HA - Angle de direction / Head angle | °  | 69          |
| SO - Enjambement / Standover         | mm | 427         |



Find this bike online

{NOUSTACHE