

XROAD ES

2026

XR1OGM500260




Product specifications may change without notice. Non-contractual information.

FRAME Xroad Open, 6061 T4-T6 alloy, variable thickness hydroformed tubes, Bosch PowerTube battery integration (vertical), integrated cable routing	REAR BRAKE Shimano, MT200, hydraulic disc	SEATCLAMP Moustache, alloy, 34.9mm
FORK SR Suntour, XCM32-ATB, LO, preload adjustment & lockout function, 100mm travel	FRONT ROTOR Shimano, 180mm	FRONT LIGHT AXA, NXT, 30 lux, powered by main battery
MOTOR Bosch, Active Line Plus, Smart System, 50Nm	REAR ROTOR Shimano, 160mm	REAR LIGHT Spanninga, Presto2Guard, powered by main battery
BATTERY Bosch, PowerTube 500Wh, vertical, Smart System	FRONT HUB Shimano, 32H, 9x100mm, QR (Quick Release)	LOCK -
CHARGER Bosch, 2Ah	REAR HUB Shimano, 32H, 9x135mm, QR (Quick Release)	KICKSTAND Moustache, adjustable
REMOTE Bosch, Purion 200, Smart System	FRONT RIM Moustache, asymmetric, alloy 6061E, welded, 32 holes, 27.5", internal width 23mm	MUDGUARD Moustache, alloy, double wall design, w/alloy stays
BCM Not equipped with Bosch ConnectModule	REAR RIM Moustache, asymmetric, alloy 6061E, welded, 32 holes, 27.5", internal width 23mm	CARRIER Moustache, alloy, removable QL3 lateral fixation, MIK HD platform
RANGE AUTONOMY 125 km	FRONT TYRE Schwalbe, Smart Sam, 27.5x2.25	PEDALS alloy platform with reflectors
REAR DERAILLEUR Shimano, CUES, RD-U3020, 9-speed	REAR TYRE Schwalbe, Smart Sam, 27.5x2.25	SIZE M
CHAINRING Narrow-Wide, 40 teeth	HANDLEBAR Moustache, ergonomic, alloy, 680mm, 25° backsweep	COLOR Chalk glossy
CASSETTE Shimano, CUES, CS-LG300 9-speed, 11-36T	STEM Moustache, alloy, adjustable, 90mm	WEIGHT 25.9 kg
CHAIN Shimano, CN-LG500, 120 links	HEADSET FSA, No 57B	GVWR 135 kg
SHIFTER Shimano, CUES, SL-U4000-9R, 9-speed	GRIPS Ergonomic, dual-density	WARRANTY 5 years frame and fork Moustache Bikes - 2 years motor, battery
CRANKS Moustache, aluminium, 170mm moteur Gen3	SADDLE Selle Royal, Wave	
FRONT BRAKE Shimano, MT200, hydraulic disc	SEATPOST Moustache, alloy, 31.6mm, 350mm	

XROAD ES

2026

XR1OGM500260

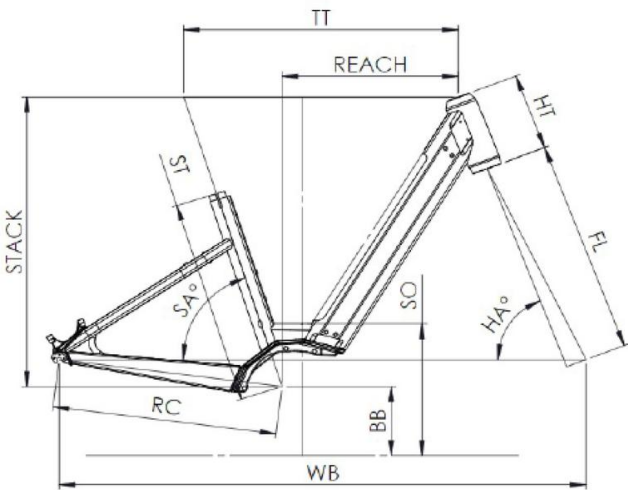

Xroad ES Open

ST - Taille / Size	mm	390 (S)	450 (M)	510 (L)
Taille utilisateur / User size	m	1,49 - 1,61	1,59 - 1,76	1,74 - 1,90
TT - Tube supérieur / Top tube	mm	555	580	605
RC - Bases / Rear center	mm	475	475	475
HT - Douille de direction / Headtube	mm	170	170	170
WB - Empattement / Wheelbase	mm	1109	1118	1143
FL - Longueur de fourche / Fork length	mm	487	487	487
BB - Hauteur de boîtier / BB height	mm	298	298	298
SA - Angle de selle / Seat angle	°	71	71	71
HA - Angle de direction / Head angle	°	67,2	68	68
Reach	mm	336	360	385
Stack	mm	643	648	648
SO - Enjambement / Standover	mm	438	438	438