

# XROAD 4 2026

XR4ORS600260



Product specifications may change without notice. Non-contractual information.

|                                                                                                                                                                                       |                                                                                |                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>FRAME</b><br>Xroad Open, 6061 T4-T6 alloy, hydroformed tubes and extruded triple cavity tubes for optimal stiffness, Bosch PowerTube battery integration, integrated cable routing | <b>CRANKS</b><br>Stronglight, aluminium, 170mm, ISI                            | <b>SADDLE</b><br>Selle Royal, Essenza + moderate                                                               |
| <b>FORK</b><br>SR Suntour, XCR 34, lockout function, 120mm travel                                                                                                                     | <b>FRONT BRAKE</b><br>Shimano, MT200, hydraulic disc                           | <b>SEATPOST</b><br>Suspension, alloy, 31.6mm, 350mm, 40mm travel                                               |
| <b>MOTOR</b><br>Bosch, Performance Line PX BDU34, Smart System, 90 Nm                                                                                                                 | <b>REAR BRAKE</b><br>Shimano, MT200, hydraulic disc                            | <b>SEATCLAMP</b><br>Moustache, alloy, 34.9mm                                                                   |
| <b>BATTERY</b><br>Bosch, PowerTube 600Wh, Smart System                                                                                                                                | <b>FRONT ROTOR</b><br>Shimano, 180mm                                           | <b>FRONT LIGHT</b><br>AXA, NXT, 80 lux, powered by main battery                                                |
| <b>CONDITIONS</b><br>Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .                                                                 | <b>REAR ROTOR</b><br>Shimano, 180mm                                            | <b>REAR LIGHT</b><br>Spanninga, Presto2Guard, powered by main battery                                          |
| <b>CHARGER</b><br>Bosch, 4Ah                                                                                                                                                          | <b>FRONT HUB</b><br>Shimano, 32H, 15x110mm, thru axle                          | <b>HORN</b><br>Spanninga Minibell Black                                                                        |
| <b>REMOTE</b><br>Bosch, Purion 200, Smart System                                                                                                                                      | <b>REAR HUB</b><br>Shimano, 32H, 9x100mm, QR (Quick Release)                   | <b>LOCK</b><br>ABUS, 4650SL,, same key for framelock & battery lock                                            |
| <b>BCM</b><br>Not equipped with Bosch ConnectModule                                                                                                                                   | <b>FRONT RIM</b><br>Alloy , 32 holes, 27.5', internal width 27 mm              | <b>KICKSTAND</b><br>Moustache, adjustable                                                                      |
| <b>RANGE AUTONOMY</b><br>144 km                                                                                                                                                       | <b>REAR RIM</b><br>Alloy , 32 holes, 27.5', internal width 27 mm               | <b>MUDGUARD</b><br>Moustache, alloy, double wall design, w/alloy stays                                         |
| <b>REAR DERAILLEUR</b><br>Shimano, CUES, RD-U6020, 10-speed                                                                                                                           | <b>FRONT TYRE</b><br>Schwalbe, Smart Sam, 27.5x2.6 / 2.35                      | <b>CARRIER</b><br>Moustache, alloy, removable QL3 lateral fixation, MIK HD platform. Moustache protect option. |
| <b>CHAINRING</b><br>Narrow-Wide, 38 teeth                                                                                                                                             | <b>REAR TYRE</b><br>Schwalbe, Smart Sam, 27.5x2.6 / 2.35                       | <b>FRONT CARRIER</b><br>PB-KITOP                                                                               |
| <b>CASSETTE</b><br>Shimano, CUES, CS-LG300 10-speed, 11-39T                                                                                                                           | <b>HANDLEBAR</b><br>Moustache, ergonomic, alloy, 660mm, 30° backsweep          | <b>PEDALS</b><br>alloy platform with reflectors                                                                |
| <b>CHAIN</b><br>Shimano, CN-LG500, 120 links                                                                                                                                          | <b>STEM</b><br>Moustache, alloy, adjustable, 65mm                              | <b>SIZE</b><br>S                                                                                               |
| <b>SHIFTER</b><br>Shimano, CUES, SL-U6000-10R, 10-speed                                                                                                                               | <b>HEADSET</b><br>Acros, AZF-699, sealed bearings, internal routing, blocklock | <b>COLOR</b><br>Metalic deep red matt                                                                          |
|                                                                                                                                                                                       | <b>GRIPS</b><br>SB3, Ergonomic                                                 | <b>WEIGHT</b><br>26.2 kg                                                                                       |

# XROAD 4 2026

XR4ORS600260



## GVWR

160 kg

## WARRANTY

5 years frame and fork Moustache Bikes - 2 years  
motor, battery




Find this bike online

{MOUSTACHE

# XROAD 4 2026

XR4ORS600260

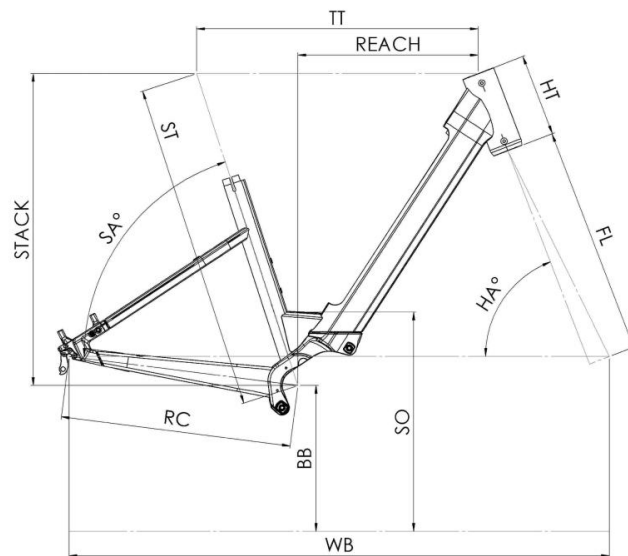

## Xroad 2 / 4 / 6 Open

| ST - Taille / Size                     | mm | 390 (S)     | 450 (M)     | 510 (L)     | 550 (XL)    |
|----------------------------------------|----|-------------|-------------|-------------|-------------|
| Taille utilisateur / User size         | m  | 1,49 - 1,61 | 1,59 - 1,76 | 1,74 - 1,92 | 1,90 - 2,05 |
| TT - Tube supérieur / Top tube         | mm | 557         | 580         | 610         | 645         |
| RC - Bases / Rear center               | mm | 475         | 475         | 475         | 475         |
| HT - Douille de direction / Headtube   | mm | 170         | 170         | 190         | 210         |
| WB - Empattement / Wheelbase           | mm | 1122        | 1134        | 1166        | 1202        |
| FL - Longueur de fourche / Fork length | mm | 527,5       | 527,5       | 527,5       | 527,5       |
| BB - Hauteur de boîtier / BB height    | mm | 300         | 300         | 300         | 300         |
| SA - Angle de selle / Seat angle       | °  | 70,8        | 70,8        | 70,8        | 70,8        |
| HA - Angle de direction / Head angle   | °  | 65,3        | 66,2        | 66,2        | 66,2        |
| Reach                                  | mm | 320,0       | 342,0       | 365,0       | 394,0       |
| Stack                                  | mm | 677         | 682         | 701         | 720         |
| SO - Enjambement / Standover           | mm | 140         | 140         | 140         | 140         |



Find this bike online

{NOUSTACHE