

# XROAD FS 4

XR4FVL60L260



Product specifications may change without notice. Non-contractual information.

|                                                                                                                                                                                                                 |                                                                                |                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| <b>FRAME</b><br>Xroad FS, aluminium, one-piece gravity cast, low stepover, increase rigidity thanks to internal ribs, unified rear swingarm, discreet internal cable routing, integrated battery and drive unit | <b>CRANKS</b><br>Stronglight, aluminium, 170mm, ISI                            | <b>SADDLE</b><br>Selle Royal, Essenza + moderate                                                |
| <b>FORK</b><br>SR Suntour, XCR 34, lockout function, 120mm travel                                                                                                                                               | <b>FRONT BRAKE</b><br>Shimano, MT200, hydraulic disc                           | <b>SEATPOST</b><br>EXA, 900i, dropper-post w/remote lever, 31.6mm, 150mm                        |
| <b>SHOCK</b><br>Moustache, Magic Grip Control 115, specific Air Shock with 2-position platform and dynamic control of rebound, build-in 165x38mm, 115mm travel                                                  | <b>REAR BRAKE</b><br>Shimano, MT200, hydraulic disc                            | <b>SEATCLAMP</b><br>Moustache, alloy, 34.9mm                                                    |
| <b>MOTOR</b><br>Bosch, Performance Line PX BDU34, Smart System, 90 Nm                                                                                                                                           | <b>FRONT ROTOR</b><br>Shimano, 180mm                                           | <b>FRONT LIGHT</b><br>AXA, NXT, 80 lux, powered by main battery                                 |
| <b>BATTERY</b><br>Bosch, PowerTube 600Wh, Smart System                                                                                                                                                          | <b>REAR ROTOR</b><br>Shimano, 180mm                                            | <b>REAR LIGHT</b><br>Spanninga, Presto2Guard, powered by main battery                           |
| <b>CHARGER</b><br>Bosch, 4Ah                                                                                                                                                                                    | <b>FRONT HUB</b><br>Shimano, 32H, 15x110mm, thru axle                          | <b>HORN</b><br>Spanninga Minibell Black                                                         |
| <b>REMOTE</b><br>Bosch, Purion 200, Smart System                                                                                                                                                                | <b>REAR HUB</b><br>Shimano, 32H, 9x100mm, QR (Quick Release)                   | <b>LOCK</b><br>Battery lock ABUS, Xplus, One-Key option. Framelock Axa Block XXL.               |
| <b>BCM</b><br>Not equipped with Bosch ConnectModule                                                                                                                                                             | <b>FRONT RIM</b><br>Alloy , 32 holes, 27.5', internal width 27 mm              | <b>KICKSTAND</b><br>Moustache, adjustable                                                       |
| <b>RANGE AUTONOMY</b><br>142 km                                                                                                                                                                                 | <b>REAR RIM</b><br>Alloy , 32 holes, 27.5', internal width 27 mm               | <b>MUDGUARD</b><br>Moustache, alloy, double wall design, w/alloy stays                          |
| <b>REAR DERAILLEUR</b><br>Shimano, CUES, RD-U6020, 10-speed                                                                                                                                                     | <b>FRONT TYRE</b><br>Schwalbe, Smart Sam, 27.5x2.35, reflective                | <b>CARRIER</b><br>Moustache, alloy, light, removable QL3 lateral fixation. MIK platform option. |
| <b>CHAINRING</b><br>Narrow-Wide, 38 teeth                                                                                                                                                                       | <b>REAR TYRE</b><br>Schwalbe, Smart Sam, 27.5x2.35, reflective                 | <b>FRONT CARRIER</b><br>PB-KITOP                                                                |
| <b>CASSETTE</b><br>Shimano, CUES, CS-LG300 10-speed, 11-39T                                                                                                                                                     | <b>HANDLEBAR</b><br>Moustache, ergonomic, alloy, 660mm, 30° backsweep          | <b>PEDALS</b><br>alloy platform with reflectors                                                 |
| <b>CHAIN</b><br>Shimano, LG500, 130 links                                                                                                                                                                       | <b>STEM</b><br>Moustache, alloy, adjustable, 110mm                             | <b>SIZE</b><br>L                                                                                |
| <b>SHIFTER</b><br>Shimano, CUES, SL-U6000-10R, 10-speed                                                                                                                                                         | <b>HEADSET</b><br>Acros, AZF-699, sealed bearings, internal routing, blocklock | <b>COLOR</b><br>Green argile metal                                                              |
|                                                                                                                                                                                                                 | <b>GRIPS</b><br>SB3, Ergonomic                                                 | <b>WEIGHT</b><br>27.4 kg                                                                        |

# XROAD FS 4

XR4FVL60L260



## GVWR

160 kg

## WARRANTY

5 years frame and fork Moustache Bikes - 2 years  
motor, battery




Find this bike online

**{MOUSTACHE**

# XROAD FS 4

XR4FVL60L260

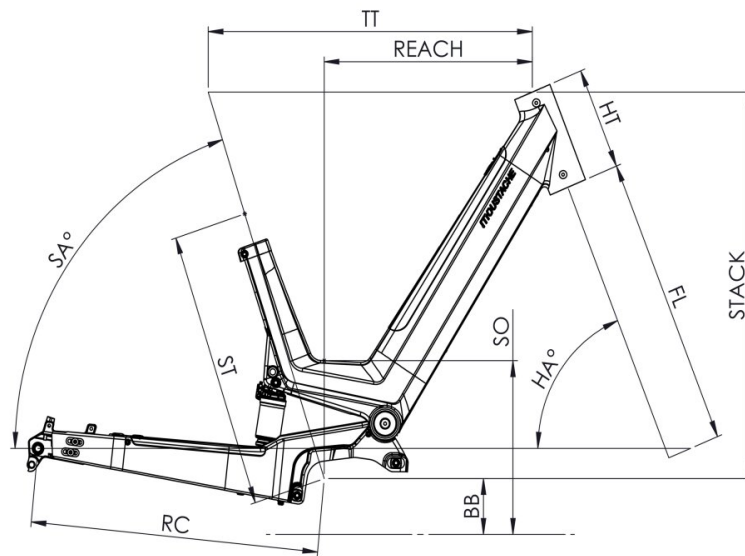

## Xroad FS / Samedi 27 OFF FS

| ST - Taille / Size                     | mm | (S)         | (M)         | (L)         |
|----------------------------------------|----|-------------|-------------|-------------|
| Taille utilisateur / User size         | m  | 1,55 - 1,72 | 1,65 - 1,85 | 1,80 - 1,95 |
| ST - Tube de selle / Seat tube         | m  | 410         | 460         | 460         |
| TT - Tube supérieur / Top tube         | mm | 580         | 600         | 600         |
| RC - Bases / Rear center               | mm | 515         | 515         | 515         |
| HT - Douille de direction / Headtube   | mm | 170         | 180         | 180         |
| WB - Empattement / Wheelbase           | mm | 1190        | 1209        | 1209        |
| FL - Longueur de fourche / Fork length | mm | 527,5       | 527,5       | 527,5       |
| BB - Hauteur de boîtier / BB height    | mm | 324         | 324         | 324         |
| SA - Angle de selle / Seat angle       | °  | 69,5        | 69,5        | 69,5        |
| HA - Angle de direction / Head angle   | °  | 66          | 66          | 66          |
| Reach                                  | mm | 344         | 361         | 361         |
| Stack                                  | mm | 651         | 661         | 661         |
| SO - Enjambement / Standover           | mm | 518         | 518         | 518         |



Find this bike online

{NOUSTACHE