

XROAD 4 2026

XR4ORL600260



Product specifications may change without notice. Non-contractual information.

FRAME Xroad Open, 6061 T4-T6 alloy, hydroformed tubes and extruded triple cavity tubes for optimal stiffness, Bosch PowerTube battery integration, integrated cable routing	CRANKS Stronglight, aluminium, 170mm, ISI	SADDLE Selle Royal, Essenza + moderate
FORK SR Suntour, XCR 34, lockout function, 120mm travel	FRONT BRAKE Shimano, MT200, hydraulic disc	SEATPOST Suspension, alloy, 31.6mm, 350mm, 40mm travel
MOTOR Bosch, Performance Line PX BDU34, Smart System, 90 Nm	REAR BRAKE Shimano, MT200, hydraulic disc	SEATCLAMP Moustache, alloy, 34.9mm
BATTERY Bosch, PowerTube 600Wh, Smart System	FRONT ROTOR Shimano, 180mm	FRONT LIGHT AXA, NXT, 80 lux, powered by main battery
REMOTE Bosch, Purion 200, Smart System	REAR ROTOR Shimano, 180mm	REAR LIGHT Spanninga, Presto2Guard, powered by main battery
CONDITIONS Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .	FRONT HUB Shimano, 32H, 15x110mm, thru axle	HORN Spanninga Minibell Black
CHARGER Bosch, 4Ah	REAR HUB Shimano, 32H, 9x100mm, QR (Quick Release)	LOCK ABUS, 4650SL,, same key for framelock & battery lock
BCM Not equipped with Bosch ConnectModule	FRONT RIM Alloy , 32 holes, 27.5', internal width 27 mm	KICKSTAND Moustache, adjustable
RANGE AUTONOMY 144 km	REAR RIM Alloy , 32 holes, 27.5', internal width 27 mm	MUDGUARD Moustache, alloy, double wall design, w/alloy stays
REAR DERAILLEUR Shimano, CUES, RD-U6020, 10-speed	FRONT TYRE Schwalbe, Smart Sam, 27.5x2.6 / 2.35	CARRIER Moustache, alloy, removable QL3 lateral fixation, MIK HD platform. Moustache protect option.
CHAINRING Narrow-Wide, 38 teeth	REAR TYRE Schwalbe, Smart Sam, 27.5x2.6 / 2.35	FRONT CARRIER PB-KITOP
CASSETTE Shimano, CUES, CS-LG300 10-speed, 11-39T	HANDLEBAR Moustache, ergonomic, alloy, 660mm, 30° backsweep	PEDALS alloy platform with reflectors
CHAIN Shimano, CN-LG500, 120 links	STEM Moustache, alloy, adjustable, 110mm	SIZE L
SHIFTER Shimano, CUES, SL-U6000-10R, 10-speed	HEADSET Acros, AZF-699, sealed bearings, internal routing, blocklock	COLOR Metalic deep red matt
	GRIPS SB3, Ergonomic	WEIGHT 26.2 kg

XROAD 4 2026

XR4ORL600260



GVWR

160 kg

WARRANTY

5 years frame and fork Moustache Bikes - 2 years
motor, battery




Find this bike online

{MOUSTACHE

XROAD 4 2026

XR4ORL600260

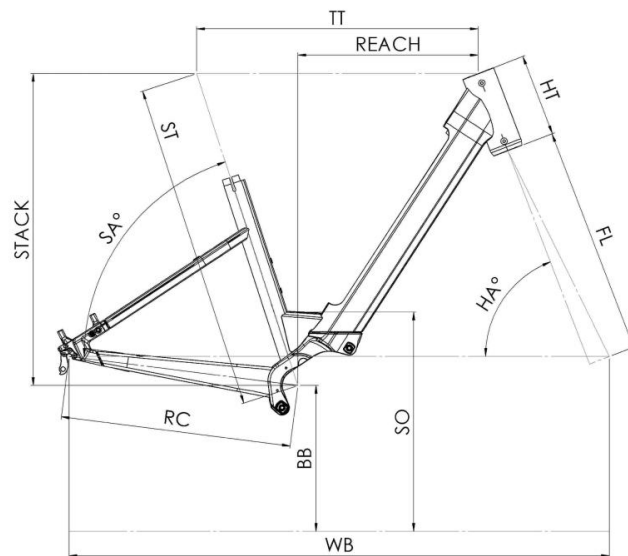

Xroad 2 / 4 / 6 Open

ST - Taille / Size	mm	390 (S)	450 (M)	510 (L)	550 (XL)
Taille utilisateur / User size	m	1,49 - 1,61	1,59 - 1,76	1,74 - 1,92	1,90 - 2,05
TT - Tube supérieur / Top tube	mm	557	580	610	645
RC - Bases / Rear center	mm	475	475	475	475
HT - Douille de direction / Headtube	mm	170	170	190	210
WB - Empattement / Wheelbase	mm	1122	1134	1166	1202
FL - Longueur de fourche / Fork length	mm	527,5	527,5	527,5	527,5
BB - Hauteur de boîtier / BB height	mm	300	300	300	300
SA - Angle de selle / Seat angle	°	70,8	70,8	70,8	70,8
HA - Angle de direction / Head angle	°	65,3	66,2	66,2	66,2
Reach	mm	320,0	342,0	365,0	394,0
Stack	mm	677	682	701	720
SO - Enjambement / Standover	mm	140	140	140	140



Find this bike online

TOUSTACHE