

DIMANCHE

28.4 OPEN M

2026

D84ONM400260



Product specifications may change without notice. Non-contractual information.


FRAME Dimanche 28 Open, 6061 T4-T6 alloy, variable thickness hydroformed tubes, CompactTube integration and internal cable routing	CHAIN Sram, Apex, 12-speed, 120 links	GRIPS Moustache bar tape, gel 2.5mm
FORK Dimanche 28, full carbon, tapered steerer tube 1"1/8-1"1/2, FlatMount 160mm direct brake mount, 12x100mm axle, 50mm offset, for tires in 700x45, mounts for mudguard	CRANKS FSA, forged aluminum, 170mm	SADDLE Selle Royal, SRX
MOTOR Bosch, Performance Line SX, Smart System, 60Nm	FRONT BRAKE SRAM, Apex, hydraulic disc	SEATPOST Moustache, alloy, 27.2mm, 350mm
BATTERY Bosch, CompactTube 400Wh, Smart System	REAR BRAKE SRAM, Apex, hydraulic disc	SEATCLAMP Moustache, alloy, 34.9mm
CONDITIONS Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .	FRONT ROTOR SRAM, Paceline, 160mm	FRONT LIGHT -
CHARGER Bosch, 2Ah	REAR ROTOR SRAM, Paceline, 160mm	PEDALS alloy platform with reflectors
DISPLAY Bosch, Kiox 300, Smart System	FRONT HUB Moustache, 24H, 12x100mm, thru axle	SIZE M
REMOTE Bosch, System Controller and Mini Remote, Smart System	REAR HUB Moustache, 24H, 12x142mm, thru axle	COLOR Black glossy
BCM Not equipped with Bosch ConnectModule	FRONT RIM Moustache, al:30, alloy 6061, welded, 24 holes, 700c, 22mm internal width	WEIGHT 16.2 kg
RANGE AUTONOMY 116 km	REAR RIM Moustache, al:30, alloy 6061, welded, 24 holes, 700c, 22mm internal width	GVWR 120 kg
REAR DERAILLEUR SRAM, Apex XPLR, 12-speed	FRONT TYRE Schwalbe, Pro One, 700x34C, SuperRace, TLE	WARRANTY 5 years frame and fork Moustache Bikes - 2 years motor, battery
CHAINRING SRAM, Narrow-Wide, 44 teeth, chainguard	REAR TYRE Schwalbe, Pro One, 700x34C, SuperRace, TLE	
CASSETTE SRAM, XPLR, PG-1231 12-speed, 11-44T	HANDLEBAR Moustache, alloy, rise 10, drop 129, reach 65, flare 16°, 420mm	
	STEM Moustache, 3D forged Aluminum, 70mm	
	HEADSET Acros, AZF-725, sealed bearings, internal routing	

DIMANCHE

28.4 OPEN M

2026

D84ONM400260

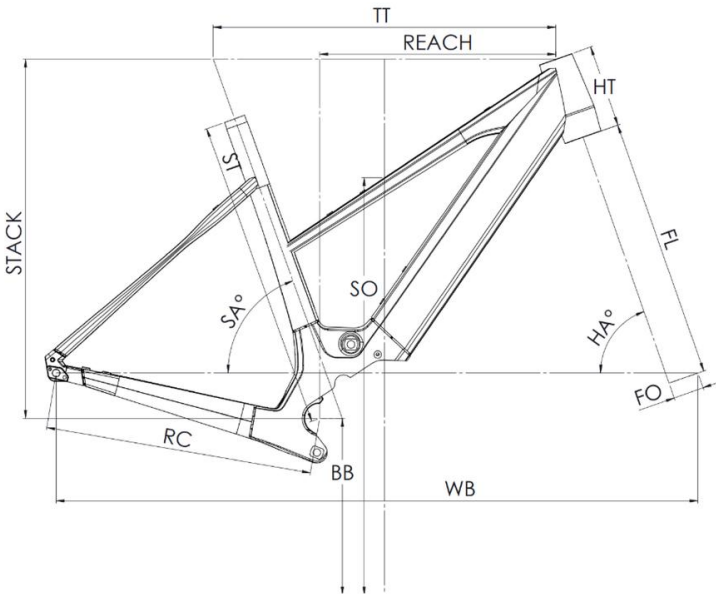

Dimanche 28 Road 2/4 Open - Dimanche 29 Gravel 2/4 Open

ST - Taille / Size	mm	430 (XS)	460 (S)	500 (M)
Taille utilisateur / User size	m	1,43 - 1,55	1,53 - 1,68	1,66 - 1,81
TT - Tube supérieur / Top tube	mm	535	545	565
RC - Bases / Rear center	mm	437	437	437
HT - Douille de direction / Headtube	mm	120	120	135
WB - Empattement / Wheelbase	mm	1039	1039	1049
FL - Longueur de fourche / Fork length	mm	415	415	415
BB - Hauteur de boîtier / BB height	mm	288,5	288,5	288,5
SA - Angle de selle / Seat angle	°	73,6	73,3	73
HA - Angle de direction / Head angle	°	69,3	70	70,7
Reach	mm	369	375	386
Stack	mm	566	569	586
SO - Enjambement / Standover	mm	662	664	680