

XR2OGL600260



FRAME Xroad Open, 6061 T4-T6 alloy, hydroformed tubes and extruded triple cavity tubes for optimal stiffness, Bosch PowerTube battery integration, integrated cable routing	FRONT BRAKE Shimano, MT200, hydraulic disc	SEATPOST Suspension, alloy, 31.6mm, 350mm, 40mm travel
FORK SR Suntour, XCM32-ATB, LO, preload adjustment & lockout function, 100mm travel	REAR BRAKE Shimano, MT200, hydraulic disc	SEATCLAMP Moustache, alloy, 34.9mm
MOTOR Bosch, Performance Line BDU34, Smart System, 75Nm	FRONT ROTOR Shimano, 180mm	FRONT LIGHT AXA, NXT, 30 lux, powered by main battery
BATTERY Bosch, PowerTube 600Wh, Smart System	REAR ROTOR Shimano, 180mm	REAR LIGHT Spanninga, Presto2Guard, powered by main battery
CHARGER Bosch, 2Ah	FRONT HUB Shimano, 32H, 9x100mm, QR (Quick Release)	HORN Spanninga Minibell Black
REMOTE Bosch, Purion 200, Smart System	REAR HUB Shimano, 32H, 9x100mm, QR (Quick Release)	LOCK ABUS, 4650SL,, same key for framelock & battery lock
BCM Not equipped with Bosch ConnectModule	FRONT RIM Alloy , 32 holes, 27.5', internal width 23 mm	KICKSTAND Moustache, adjustable
RANGE AUTONOMY 144 km	REAR RIM Alloy , 32 holes, 27.5', internal width 23 mm	MUDGUARD Moustache, alloy, double wall design, w/alloy stays
REAR DERAILLEUR Shimano, CUES, RD-U3020, 9-speed	FRONT TYRE Schwalbe, Smart Sam, 27.5x2.6 / 2.35	CARRIER Moustache, alloy, removable QL3 lateral fixation, MIK HD platform. Moustache protect option.
CHAINRING Narrow-Wide, 40 teeth	REAR TYRE Schwalbe, Smart Sam, 27.5x2.6 / 2.35	FRONT CARRIER PB-KITOP
CASSETTE Shimano, CUES, CS-LG300 9-speed, 11-36T	HANDLEBAR Moustache, ergonomic, alloy, 660mm, 30° backsweep	PEDALS alloy platform with reflectors
CHAIN Shimano, CN-LG500, 120 links	STEM Moustache, alloy, adjustable, 110mm	SIZE L
SHIFTER Shimano, CUES, SL-U4000-9R, 9-speed	HEADSET Acros, AZF-699, sealed bearings, internal routing, blocklock	COLOR Titanium matt
CRANKS Stronglight, aluminium, 170mm, ISI	GRIPS SB3, Ergonomic	WEIGHT 26.6 kg
	SADDLE Selle Royal, Essenza + moderate	GVWR 135 kg

XROAD 2

XR2OGL600260



WARRANTY

5 years frame and fork Moustache Bikes - 2 years
motor, battery




Find this bike online

{MOUSTACHE

XROAD 2

XR2OGL600260

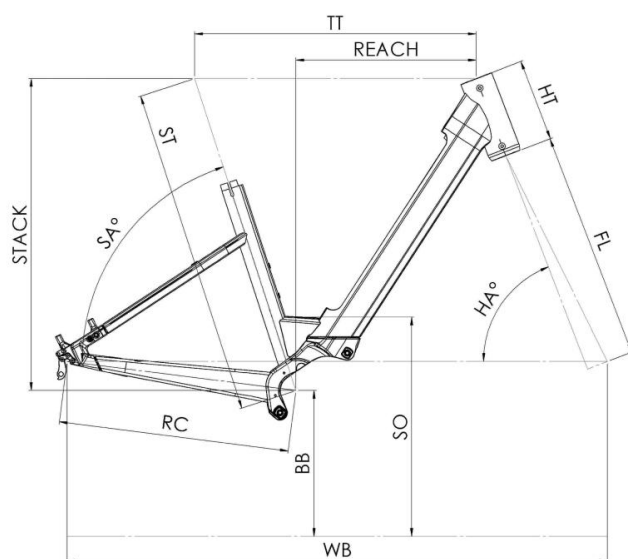

Xroad 2 / 4 / 6 Open

ST - Taille / Size	mm	390 (S)	450 (M)	510 (L)	550 (XL)
Taille utilisateur / User size	m	1,49 - 1,61	1,59 - 1,76	1,74 - 1,92	1,90 - 2,05
TT - Tube supérieur / Top tube	mm	557	580	610	645
RC - Bases / Rear center	mm	475	475	475	475
HT - Douille de direction / Headtube	mm	170	170	190	210
WB - Empattement / Wheelbase	mm	1122	1134	1166	1202
FL - Longueur de fourche / Fork length	mm	527,5	527,5	527,5	527,5
BB - Hauteur de boîtier / BB height	mm	300	300	300	300
SA - Angle de selle / Seat angle	°	70,8	70,8	70,8	70,8
HA - Angle de direction / Head angle	°	65,3	66,2	66,2	66,2
Reach	mm	320,0	342,0	365,0	394,0
Stack	mm	677	682	701	720
SO - Enjambement / Standover	mm	140	140	140	140



Find this bike online

TOUSTACHE