

DIMANCHE 29.2 GRAVEL



FRAME

Dimanche 29, 6061 T4-T6 alloy, variable thickness hydroformed tubes, tapered headtube 1"1/8-1"1/2, reversed Hidden Power technology

SEATCLAMP

Moustache, alloy, 34.9mm

HEADSET

FSA, No 57B-1

FORK

Dimanche 29, full carbon, tapered steerer tube 1"1/8-1"1/2, FlatMount 180mm direct brake mount, 12x100mm axle, 50mm offset, for tires in 700x50 (max 700x42 with mud guard), mounts for mudguard and luggage racks

MOTOR

Bosch, Performance Line, 250W, 35/65Nm

BATTERY

Bosch, PowerPack 500Wh

DISPLAY

Bosch, Purion - « Walk assist »

CHARGER

Bosch, 4Ah

RIMS

Moustache, al:30, alloy 6061, welded, 24 holes, 700c, 22mm internal width

FRONT HUB

Moustache, 24H, 12x100mm, thru axle

TYRES

Maxxis, Rambler, 700x45C, 120TPI

REAR HUB

Moustache, 24H, 12x142mm, thru axle

STEM

Moustache, alloy, 3D forged, 80mm

HANDLEBAR

Moustache Flexbar by Baramind, 660mm, filters vibrations, S/M: Medium, L/XL: Hard

GRIPS

Ergonomic, dual-density

SADDLE

Selle Royal, VIVO

SEATPOST

EXA, 860i, suspended dropper-post w/remote lever, 31.6mm, 75mm

CASSETTE

Sunrace, CSMS7, 11-speed, 11-42T

CHAIN

Sram, PC1110, 11-speed, 118 links

REAR DERAILLEUR

Shimano, Deore, RD-M5120-SGS, 10-11-speed

SHIFTER

Shimano, Deore, SL-M5100-R, 11-speed

CRANKS

Moustache, aluminium, 170mm

CHAINRING

Narrow-Wide, 42 teeth, chainguard

PEDALS

Resin platform with reflectors

FRONT BRAKE

Alhonga, HJ-472, hydraulic disc

FRONT ROTOR

Alhonga, 160mm

REAR BRAKE

Alhonga, HJ-472, hydraulic disc

REAR ROTOR

Alhonga, 160mm

AUTONOMY

110km

GVWR

120kg

WEIGHT

18.6kg

SIZES

S (1,53 - 1,68m) M (1,66 - 1,81m) L (1,79 - 1,94m)
XL (1,92 - 2,07m)

COLORS

Petrol Blue glossy

CONDITIONS

Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .

WARRANTY


5 years frame and fork Moustache Bikes - 2 years motor, battery



Scan to find this bike online

{MOUSTACHE

DIMANCHE 29.2 GRAVEL

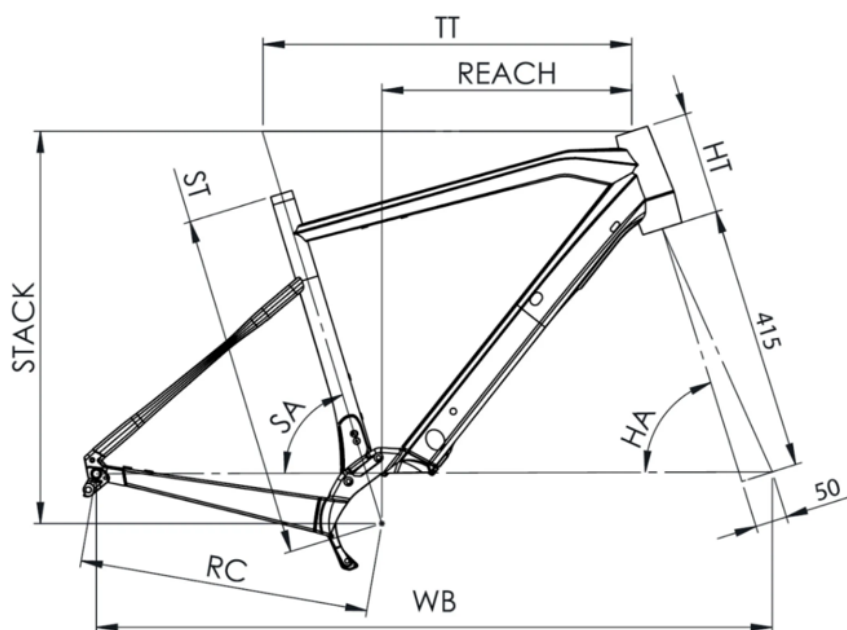

ST - TAILLE / SIZE	mm	460 (S)	500 (M)	540 (L)	580 (XL)
Taille utilisateur / User size	m	1,53 - 1,68	1,66 - 1,81	1,79 - 1,94	1,92 - 2,07
TT - Tube supérieur / Top tube	mm	540	560	580	600
RC - Bases / Rear center	mm	455	455	455	455
HT - Douille de direction / Headtube	mm	120	135	160	180
WB - Empattement / Wheelbase	mm	1052	1052	1062	1073
FL - Longueur de fourche / Fork length	mm	415	415	415	415
BB - Hauteur de boîtier / BB height	mm	285	285	285	285
SA - Angle de selle / Seat angle	°	74	73,5	73	72,7
HA - Angle de direction / Head angle	°	70,5	72	72,5	73
Reach	mm	377	386	392	402
Stack	mm	568	588	614	635
SO - Enjambement / Standover	mm	766	795	816	832



Scan to find this bike online

{MOUSTACHE