

# SAMEDI 29 GAME 5 625WH




|  |  |   |
|--|--|---|
| <b>FRAME</b><br>Game, 6061 T4-T6 alloy, w/160mm travel, Bosch PowerTube custom battery integration (horizontal), 12x148mm, Boost, motor cover w/cooling fins & chainguide                    | <b>STEM</b><br>Moustache, alloy, 3D forged, 40mm   | <b>AUTONOMY</b><br>97km   |
| <b>SEATCLAMP</b><br>Moustache, alloy, 38.6mm   | <b>HANDLEBAR</b><br>Moustache, alloy, 780mm, 12mm rise, 9° backsweep, 4° upsweep                             | <b>GVWR</b><br>140kg  |
| <b>HEADSET</b><br>Acros, AZX-579, sealed bearings  | <b>GRIPS</b><br>SB3, Race  | <b>WEIGHT</b><br>24.4kg   |
| <b>SHOCK</b><br>Moustache, Magic Grip Control 160, specific Air Shock w/ 2-position platform and dynamic control of rebound, Trunion mount, build-in 205x65mm, 160mm travel                  | <b>SADDLE</b><br>Moustache, Sport, steel rails   | <b>SIZES</b><br>S (1,56 - 1,72m) M (1,69 - 1,85m) L (1,82 - 1,98m) XL (1,95 - 2,11m)                                  |
| <b>FORK</b><br>Marzocchi, Bomber Z1, E-tuned, GRIP, compression sweep adjust, 170mm travel, 15x110mm, Boost, 44mm offset   | <b>SEATPOST</b><br>EXA, 900i, dropper-post w/remote lever, 31.6mm, 125mm                                     | <b>COLORS</b><br>Black / Cool Grey glossy   |
| <b>MOTOR</b><br>Bosch, Performance Line CX, 250W, Smart System, 85Nm   | <b>CASSETTE</b><br>Sunrace, CSMZ8, 12-speed, 11-51T  | <b>CONDITIONS</b><br>Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range . |
| <b>BATTERY</b><br>Bosch, PowerTube 625Wh, horizontal, Smart System   | <b>CHAIN</b><br>Shimano, CN-M6100, 12-speed, 120 links   | <b>WARRANTY</b><br>5 years frame and fork Moustache Bikes - 2 years motor, battery                                    |
| <b>DISPLAY</b><br>Bosch, Kiox 300, Smart System, compact, color screen, customizable screens, Lock function (optional), « Walk assist »  | <b>REAR DERAILLEUR</b><br>Shimano, XT, RD-M8100-SGS, 12-speed  | <b>REMOTE</b><br>Bosch, LED remote Bluetooth  |
| <b>CHARGER</b><br>Bosch, 4Ah   | <b>SHIFTER</b><br>Shimano, Deore, SL-M6100, 12-speed   | <b>BOSCH CONNECT MODULE (BCM)</b><br>Bosch Connect Module (BCM) compatible, with eBike Alarm function                 |
| <b>RIMS</b><br>Moustache, asymmetric, alloy 6061E, welded, double wall, 28 holes, 29", internal width 30mm, mounted with Tubeless valves & flap, brass nuts with locking "Blue Nylon" insert | <b>CRANKS</b><br>Moustache, forged aluminium, 165mm  |   |
| <b>FRONT HUB</b><br>Shimano, 28H, 15x110mm, thru axle  | <b>CHAINRING</b><br>FSA, Narrow Wide, 34 teeth   |   |
| <b>TYRES</b><br>Maxxis, Assegai, 29x2.50, foldable, EXO/TR (Tubeless Ready)  | <b>PEDALS</b><br>alloy platform with reflectors  |   |
| <b>REAR HUB</b><br>Shimano, 28H, 12x148mm, thru axle   | <b>FRONT BRAKE</b><br>Shimano, BR-M6120, hydraulic disc, 4 pistons or Magura, MT5, hydraulic disc, 4 pistons |   |
|  | <b>FRONT ROTOR</b><br>Shimano, 203mm or Magura, 203mm  |   |
|  | <b>REAR BRAKE</b><br>Shimano, BR-M6120, hydraulic disc, 4 pistons or Magura, MT5, hydraulic disc, 4 pistons  |   |
|  | <b>REAR ROTOR</b><br>Shimano, 203mm or Magura, 203mm   |   |



Scan to find this bike online

**{MOUSTACHE**

# SAMEDI 29 GAME 5 625WH

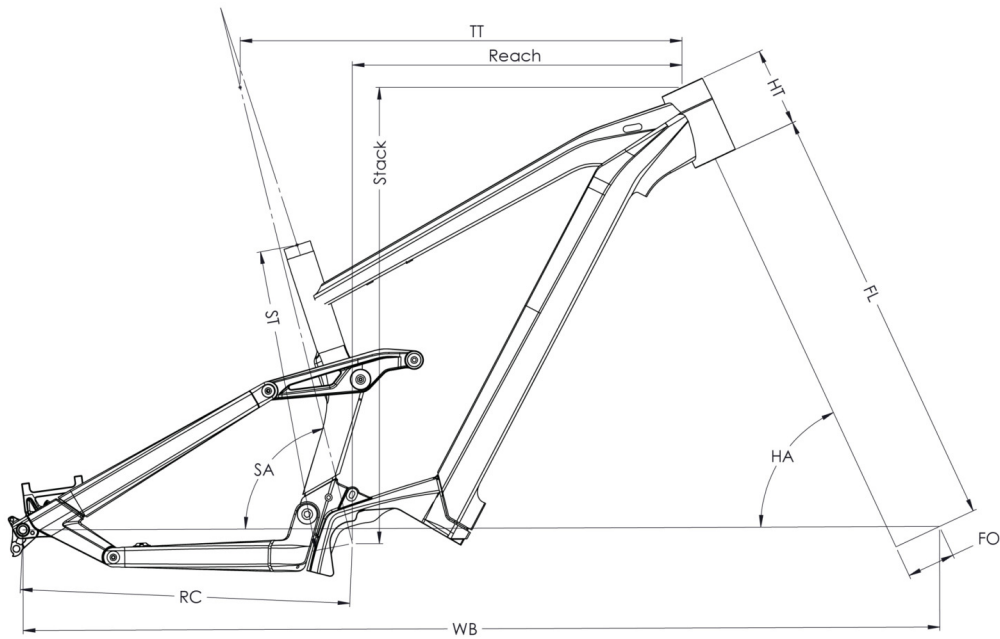

| TAILLE - ST                              | Unités | 390 (S)     | 420 (M)     | 450 (L)     | 480 (XL)    |
|--|--------|-------------|-------------|-------------|-------------|
| Taille utilisateur (à titre indicatif)   | m      | 1,56 - 1,72 | 1,69 - 1,85 | 1,82 - 1,98 | 1,95 - 2,11 |
| Tube supérieur (mesure horizontale) - TT | mm     | 590         | 620         | 645         | 670         |
| Bases - RC                               | mm     | 462         | 462         | 462         | 462         |
| Douille de direction - HT                | mm     | 100         | 110         | 130         | 140         |
| Empattement - WB                         | mm     | 1225        | 1257        | 1286        | 1313        |
| Hauteur boîtier - BB                     | mm     | 350         | 350         | 350         | 350         |
| Longueur de fourche - FL                 | mm     | 583,7       | 583,7       | 583,7       | 583,7       |
| Offset de fourche - FO                   | mm     | 44          | 44          | 44          | 44          |
| Angle de tube de selle - STa             | °      | 76          | 76          | 76          | 76          |
| Angle de douille de direction - HTa      | °      | 65          | 65          | 65          | 65          |
| Reach                                    | mm     | 433         | 461         | 481         | 504         |
| Stack                                    | mm     | 628         | 638         | 655         | 664         |
| Enjambement - SO                         | mm     | 836         | 845         | 863         | 873         |
| Hauteur de roue - WH                     | mm     | 750         | 750         | 750         | 750         |



Scan to find this bike online

**TOUSTACHE**