# CLUTCH 160.9

C69FGL700250




Product specifications may change without notice. Non-contractual information.

**FRAME**
Clutch, 6061 T4-T6 alloy, 160mm travel, custom integration of Moustache Batterie and Pinion MGU, internal cable routing, 12x148mm, Boost, 29"/27.5" Mullet wheel configuration

**FORK**
RockShox, ZEB, Ultimate, DebonAir+ spring w/ external rebound and HS/LS compression, Buttercups, 170mm travel, 15x110mm Boost, 44mm offset, mini-fender compatible

**SHOCK**
Rockshox, Vivid, Ultimate, 2 positions lever, rebound and compression adjustement, Moustache tune, 230-65mm, 160mm travel

**MOTOR**
Pinion MGU, integrated 12 speed, 85-160Nm

**BATTERY**
Moustache 780Wh

**DISPLAY**
FIT, Master Node Display

**REMOTE**
FIT Remote Pure with control ring and function button

**CHARGER**
FIT, 4.8Ah

**CHAINRING**
Gates, Carbon Drive 39T

**CASSETTE**
Gates, CDX Carbon Drive 39T

**CHAIN**
Gates, CDX belt, clean, smooth and resistant

**SHIFTER**
Pinion TE1 E-Trigger

**CRANKS**
Pinion, alloy 160mm

**FRONT BRAKE**
Magura, Gustav Pro, hydraulic disc, 4 pistons

**REAR BRAKE**
Magura, Gustav Pro, hydraulic disc, 4 pistons

**FRONT ROTOR**
Magura, MDR-S, 203mm, 2,5mm thickness

**REAR ROTOR**
Magura, MDR-S, 203mm, 2,5mm thickness

**FRONT HUB**
Moustache by Mavic, 28H, Centerlock, 15x110mm, thru axle

**REAR HUB**
Moustache by Mavic, 28H, ID360, 12x148mm, thru axle

**FRONT RIM**
Mavic, XM1030, Maxtal, welded, 28 holes, 29", internal width 30mm, mounted with Tubeless valves & flap, brass nuts with locking "Blue Nylon" insert

**REAR RIM**
Mavic, XM1030, Maxtal, welded, 28 holes, 27,5", internal width 30mm, mounted with Tubeless valves & flap, brass nuts with locking "Blue Nylon" insert

**WHEELS**
Mavic XM1030 / Maxxis Assegai 29x2.5 27.5x2.5 DD

**FRONT TYRE**
Maxxis, Assegai, 29x2.50, foldable, 3C MaxxGrip / DD / TR (Tubeless Ready)

**REAR TYRE**
Maxxis, Assegai, 27.5x2.50, foldable, 3C MaxxGrip / DD / TR (Tubeless Ready)

**HANDLEBAR**
Moustache, alloy, 780mm, 35mm, 30mm rise, 9° backsweep, 5° upsweep

**STEM**
Moustache, alloy, 3D forged, 40mm

**HEADSET**
Acros, AZF-725, sealed bearings, internal routing, integrated multi-tool

**GRIPS**
SB3, Hornet

**SADDLE**
Fizik, Terra Aidon X5

**SEATPOST**
KS, Lev Integra, dropper-post w/ Shimano remote lever, 31.6mm, 175mm

**SEATCLAMP**
Moustache, alloy, 38.6mm, integrated light

**FRONT LIGHT**
Front light cable pre-installed in the frame, Supernova compatible plug

**HORN**
Spanninga Minibell Black

**PEDALS**
alloy platform with reflectors

**SIZE**
L

**COLOR**
Slab Grey glossy

**WEIGHT**
27.4 kg

**GVWR**
150 kg

**WARRANTY**
5 years frame and fork Moustache Bikes - 2 years motor, battery


**Find this bike online**

MOUSTACHE

# CLUTCH 160.9

C69FGL700250



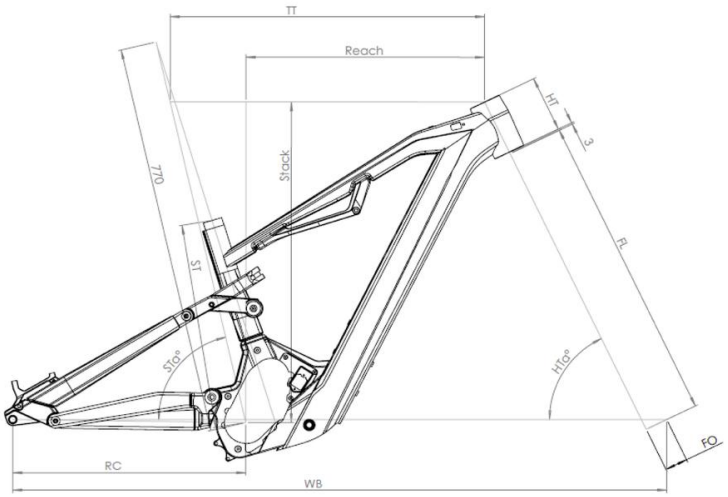


## CLUTCH 160

| ST - Taille / Size | mm | 370 (S) | 400 (M) | 430 (L) | 460 (XL) |
|---|---|---|---|---|---|
| Taille utilisateur / User size | m | 1,55 - 1,70 | 1,65 - 1,80 | 1,75 - 1,90 | 1,85 - 2,03 |
| TT - Tube supérieur / Top tube | mm | 580 | 607 | 631 | 657 |
| RC - Bases / Rear center | mm | 450 | 450 | 450 | 450 |
| HT - Douille de direction / Headtube | mm | 100 | 110 | 130 | 140 |
| WB - Empattement / Wheelbase | mm | 1224 | 1253 | 1282 | 1310 |
| BB - Hauteur de boitier / BB height | mm | 349 | 349 | 349 | 349 |
| SA - Angle de selle / Seat angle | ° | 77 | 77 | 77 | 77 |
| HA - Angle de direction / Head angle | ° | 64,2 | 64,2 | 64,2 | 64,2 |
| Reach | mm | 435 | 460 | 480 | 504 |
| Stack | mm | 625 | 637 | 652 | 660 |
| SO - Enjambement / Standover | mm | 806 | 806 | 806 | 806 |

**Find this bike online**

MOUSTACHE