

SAMEDI 26

FAT 4

SA26CF440240



Product specifications may change without notice. Non-contractual information.

FRAME

FAT 4, 6061 T4-T6 alloy, variable thickness hydroformed tubes, tapered headtube 1"1/8-1"1/2, Bosch PowerTube battery integration (Horizontal), compatible with 26 x 4.8 tires, 12x197mm rear hub

FORK

Manitou, Mastodon Comp Extended, external compression and rebound adjustment, 100mm travel, 15x150mm

MOTOR

Bosch, Performance Line CX BDU37, Smart System, 85Nm

BATTERY

Bosch, PowerTube 625Wh, horizontal, Smart System

AUTONOMY

94 km

CHARGER

Bosch, 4Ah

REMOTE

Bosch, Purion 200, Smart System

BCM

Not equipped with Bosch ConnectModule

REAR DERAILLEUR

Shimano, Deore, RD-M5100-SGS, 11-speed

CHAINRING

Narrow-Wide, 34 teeth, FAT specific

CASSETTE

Shimano, Deore, CS-M5100, 11-speed, 11-51T

CHAIN

Sram, PC1110, 11-speed, 124 links

SHIFTER

Shimano, Deore, SL-M5100-IR, 11-speed

CRANKS

Forged aluminum, 170mm, FAT specific, 30mm offset

FRONT BRAKE

Shimano, BR-M6120, hydraulic disc, 4 pistons

REAR BRAKE

Shimano, BR-M6120, hydraulic disc, 4 pistons

FRONT ROTOR

Shimano, 203mm

REAR ROTOR

Shimano, 203mm

FRONT HUB

Moustache, 32H, 15x150mm, thru axle

REAR HUB

Moustache, 32H, 12x197mm, thru axle

FRONT RIM

Moustache, alloy 6061E, welded, 32 holes, 26", internal width 80mm

REAR RIM

Moustache, alloy 6061E, welded, 32 holes, 26", internal width 80mm

FRONT TYRE

Maxxis, Minion FBF, 26x4.80

REAR TYRE

Maxxis, Minion FBR, 26x4.80

HANDLEBAR

Moustache, alloy, 760mm, 15mm rise, 9° backsweep, 5° upsweep

STEM

Moustache, 3D forged Aluminum, 60mm

HEADSET

FSA, No 57B-1

GRIPS

SB3, Race

SADDLE

Moustache, Ergonomic

SEATPOST

EXA, 900i, dropper w/remote lever, 31.6mm

SEATCLAMP

Moustache, alloy, 34.9mm

FRONT LIGHT

-

PEDALS

alloy platform with reflectors

SIZE

S

COLOR

pastel mint glossy

WEIGHT

25.5 kg

GVWR

150 kg

WARRANTY

5 years frame and fork Moustache Bikes - 2 years motor, battery




Find this bike online

{MOUSTACHE

SAMEDI 26

FAT 4

SA26CF440240

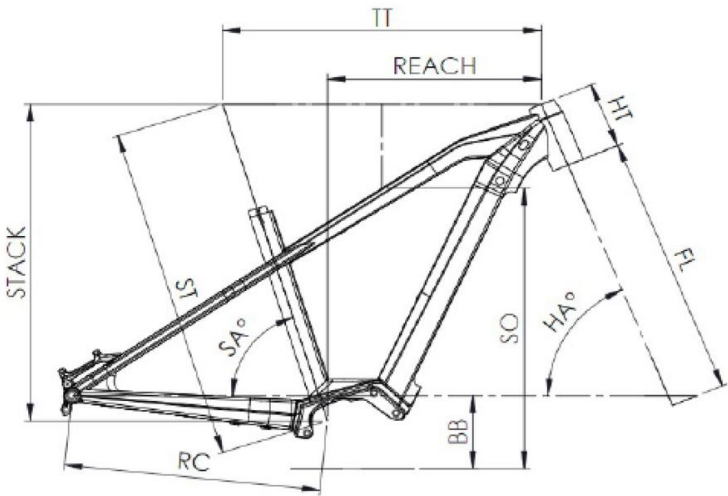

Fat

ST - Taille / Size	mm	400 (S)	440 (M)	490 (L)
Taille utilisateur / User size	m	1,50 - 1,68	1,65 - 1,83	1,81 - 1,95
TT - Tube supérieur / Top tube	mm	575	600	625
RC - Bases / Rear center	mm	483	483	483
HT - Douille de direction / Headtube	mm	120	130	140
WB - Empattement / Wheelbase	mm	1159	1176	1202
FL - Longueur de fourche / Fork length	mm	513	513	513
BB - Hauteur de boîtier / BB height	mm	330	330	330
SA - Angle de selle / Seat angle	°	73	72,5	72,5
HA - Angle de direction / Head angle	°	67,3	67,5	67,5
Reach	mm	386	402	424
Stack	mm	615	625	634
SO - Enjambement / Standover	mm	787	789	793



Find this bike online