

XROAD 4 FS

2026

XR4FVL60L260



Product specifications may change without notice. Non-contractual information.

FRAME Xroad FS, aluminium, one-piece gravity cast, low stepover, increase rigidity thanks to internal ribs, unified rear swingarm, discreet internal cable routing, integrated battery and drive unit	CHAIN Shimano, LG500, 130 links	HEADSET Acros, AZF-699, sealed bearings, internal routing, blocklock
FORK SR Suntour, XCR 34, lockout function, 120mm travel	SHIFTER Shimano, CUES, SL-U6000-10R, 10-speed	GRIPS SB3, Ergonomic
SHOCK Moustache, Magic Grip Control 115, specific Air Shock with 2-position platform and dynamic control of rebound, build-in 165x38mm, 115mm travel	CRANKS Stronglight, aluminium, 170mm, ISI	SADDLE Selle Royal, Essenza + moderate
MOTOR Bosch, Performance Line PX BDU34, Smart System, 90 Nm	FRONT BRAKE Shimano, MT200, hydraulic disc	SEATPOST EXA, 900i, dropper-post w/remote lever, 31.6mm, 150mm
BATTERY Bosch, PowerTube 600Wh, Smart System	REAR BRAKE Shimano, MT200, hydraulic disc	SEATCLAMP Moustache, alloy, 34.9mm
CONDITIONS Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .	FRONT ROTOR Shimano, 180mm	FRONT LIGHT AXA, NXT, 80 lux, powered by main battery
CHARGER Bosch, 4Ah	REAR ROTOR Shimano, 180mm	REAR LIGHT Spanninga, Presto2Guard, powered by main battery
REMOTE Bosch, Purion 200, Smart System	FRONT HUB Shimano, 32H, 15x110mm, thru axle	HORN Spanninga Minibell Black
BCM Not equipped with Bosch ConnectModule	REAR HUB Shimano, 32H, 9x100mm, QR (Quick Release)	LOCK Battery lock ABUS, Xplus, One-Key option. Framelock Axa Block XXL.
RANGE AUTONOMY 142 km	FRONT RIM Alloy , 32 holes, 27.5', internal width 27 mm	KICKSTAND Moustache, adjustable
REAR DERAILLEUR Shimano, CUES, RD-U6020, 10-speed	REAR RIM Alloy , 32 holes, 27.5', internal width 27 mm	MUDGUARD Moustache, alloy, double wall design, w/alloy stays
CHAINRING Narrow-Wide, 38 teeth	FRONT TYRE Schwalbe, Smart Sam, 27.5x2.35, reflective	CARRIER Moustache, alloy, light, removable QL3 lateral fixation. MIK platform option.
CASSETTE Shimano, CUES, CS-LG300 10-speed, 11-39T	REAR TYRE Schwalbe, Smart Sam, 27.5x2.35, reflective	FRONT CARRIER PB-KITOP
	HANDLEBAR Moustache, ergonomic, alloy, 660mm, 30° backsweep	PEDALS alloy platform with reflectors
	STEM Moustache, alloy, adjustable, 110mm	

XROAD 4 FS 2026

XR4FVL60L260



SIZE

L

COLOR

Green argile metal

WEIGHT

27.4 kg

GVWR

160 kg


WARRANTY

5 years frame and fork Moustache Bikes - 2 years motor, battery

XROAD 4 FS

2026

XR4FVL60L260

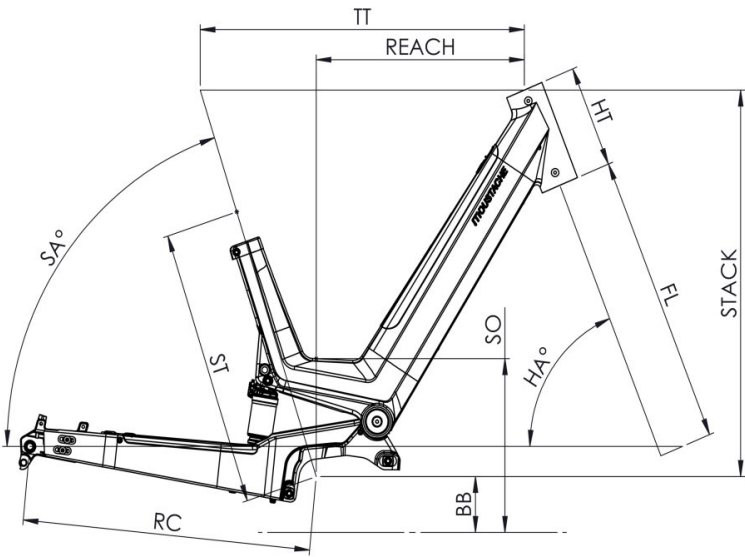

Xroad FS / Samedi 27 OFF FS

ST - Taille / Size	mm	(S)	(M)	(L)
Taille utilisateur / User size	m	1,55 - 1,72	1,65 - 1,85	1,80 - 1,95
ST - Tube de selle / Seat tube	m	410	460	460
TT - Tube supérieur / Top tube	mm	580	600	600
RC - Bases / Rear center	mm	515	515	515
HT - Douille de direction / Headtube	mm	170	180	180
WB - Empattement / Wheelbase	mm	1190	1209	1209
FL - Longueur de fourche / Fork length	mm	527,5	527,5	527,5
BB - Hauteur de boîtier / BB height	mm	324	324	324
SA - Angle de selle / Seat angle	°	69,5	69,5	69,5
HA - Angle de direction / Head angle	°	66	66	66
Reach	mm	344	361	361
Stack	mm	651	661	661
SO - Enjambement / Standover	mm	518	518	518