

DIMANCHE 29

GRAVEL 6 2025

DI29CG658240



Product specifications may change without notice. Non-contractual information.

FRAME Dimanche 29, 6061 T4-T6 alloy, variable thickness hydroformed tubes, CompactTube integration and internal cable routing	CRANKS FSA, forged aluminum, 170mm	GRIPS Moustache bar tape
FORK Dimanche 29, full carbon, tapered steerer tube 1"1/8-1"1/2 - FlatMount 180mm direct brake mount - 12x100mm Axle - 50mm offset - For tires in 700x50 - Mounts for mud-guard and luggage racks	FRONT BRAKE SRAM, Apex AXS, hydraulic disc	SADDLE Selle Royal, VIVO
MOTOR Bosch, Performance Line SX, Smart System, 60Nm	REAR BRAKE SRAM, Apex AXS, hydraulic disc	SEATPOST EXA, 860i, suspension dropper-post w/remote lever, 31.6mm, 75mm
BATTERY Bosch, CompactTube 400Wh, Smart System	FRONT ROTOR SRAM, Paceline, 160mm	SEATCLAMP Moustache, alloy, 34.9mm
CONDITIONS Maximum distance, calculated for a 70kg rider in ideal conditions. Estimate your battery range .	REAR ROTOR SRAM, Paceline, 160mm	FRONT LIGHT -
CHARGER Bosch, 2Ah	FRONT HUB Mavic, 24H, 12x100mm, thru axle	PEDALS alloy platform with reflectors
DISPLAY Bosch, Kiox 300, Smart System	REAR HUB Mavic, 24H, ID360, 12x142mm, thru axle	SIZE XL
REMOTE Bosch, System Controller and Mini Remote, Smart System	FRONT RIM Mavic, Allroad S, alloy, 24H, 700c, 25mm width, Tubeless compatible	COLOR Fir Green glossy
RANGE AUTONOMY 90 km	REAR RIM Mavic, Allroad S, alloy, 24H, 700c, 25mm width, Tubeless compatible	WEIGHT 17.6 kg
REAR DERAILLEUR SRAM, X1 AXS, 12-speed, electronic	FRONT TYRE Maxxis, Rambler, 700x50C, Tanwall	GVWR 120 kg
CHAINRING SRAM, Narrow-Wide, 44 teeth, chainguard	REAR TYRE Maxxis, Rambler, 700x50C, Tanwall	WARRANTY 5 years frame and fork Moustache Bikes - 2 years motor, battery
CASSETTE SRAM, Eagle, PG-1230 12-speed, 11-50T	HANDLEBAR Moustache, alloy, Gravel, drop 105, reach 65, flare 20°, 520mm	
CHAIN Sram, SX Eagle, 12-speed, 120 links	STEM Moustache, aluminium, suspended 10-20mm travel, 90mm	
	HEADSET Acros, AZF-725, sealed bearings, internal routing	




Find this bike online



DIMANCHE 29

GRAVEL 6 2025

DI29CG658240

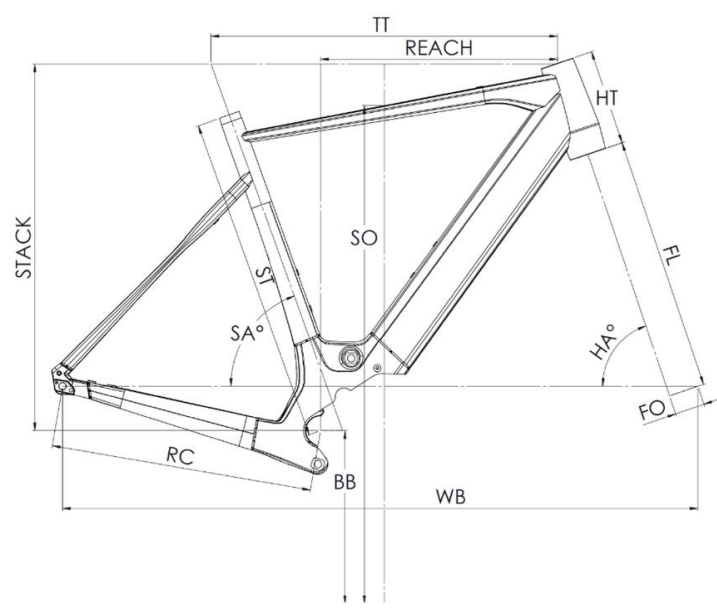

Dimanche 28 Road 2/4/6 - Dimanche 29 Gravel 2/4/6

ST - Taille / Size	mm	460 (S)	500 (M)	540 (L)	580 (XL)
Taille utilisateur / User size	m	1,53 - 1,68	1,66 - 1,81	1,79 - 1,94	1,92 - 2,07
TT - Tube supérieur / Top tube	mm	545	565	585	605
RC - Bases / Rear center	mm	437	437	437	437
HT - Douille de direction / Headtube	mm	120	135	160	180
WB - Empattement / Wheelbase	mm	1039	1049	1061	1071
FL - Longueur de fourche / Fork length	mm	415	415	415	415
BB - Hauteur de boîtier / BB height	mm	288,5	288,5	288,5	288,5
SA - Angle de selle / Seat angle	°	73,3	73	72,8	72,5
HA - Angle de direction / Head angle	°	70	70,7	71,3	72
Reach	mm	375	386	395	405
Stack	mm	569	586	612	634
SO - Enjambement / Standover	mm	772	800	830	850



Find this bike online

{NOUSTACHE