

XROAD 6

XR6OVL600260



Product specifications may change without notice. Non-contractual information.

FRAME Xroad Open, 6061 T4-T6 alloy, hydroformed tubes and extruded triple cavity tubes for optimal stiffness, Bosch PowerTube battery integration, integrated cable routing	FRONT BRAKE Magura, MT Thirty, hydraulic disc, 4 pistons	SEATPOST EXA, 860i, suspension dropper-post w/remote lever, 31.6mm, 125mm
FORK SR Suntour, XCR 34, lockout function, 120mm travel	REAR BRAKE Magura, MT Thirty, hydraulic disc, 2 pistons	SEATCLAMP Moustache, alloy, 34.9mm
MOTOR Bosch, Performance Line CX BDU38, Smart System, 120 Nm	FRONT ROTOR Magura, MDR-C, 180mm	REAR LIGHT Spanninga, Presto2Guard, powered by main battery
BATTERY Bosch, PowerTube 600Wh, Smart System	REAR ROTOR Magura, MDR-C, 180mm	HORN Spanninga Minibell Black
CHARGER Bosch, 4Ah	FRONT HUB Shimano, 32H, 15x110mm, thru axle	LOCK ABUS, 6950ML, same key for framelock & battery lock. One-Key option.
DISPLAY Bosch, Kiox 500, Smart System	REAR HUB Shimano, 32H, 9x100mm, QR (Quick Release)	KICKSTAND Moustache, adjustable
REMOTE Bosch, LED remote Bluetooth	FRONT RIM Alloy , 32 holes, 27.5', internal width 27 mm	MUDGUARD Moustache, alloy, double wall design, w/alloy stays
BCM Not equipped with Bosch ConnectModule	REAR RIM Alloy , 32 holes, 27.5', internal width 27 mm	CARRIER Moustache, alloy, removable QL3 lateral fixation, MIK HD platform. Moustache protect option.
RANGE AUTONOMY 137 km	FRONT TYRE Schwalbe, Smart Sam, 27.5x2.6 / 2.35	FRONT CARRIER PB-KITOP
REAR DERAILLEUR Shimano, CUES, RD-U6020-11, 11-speed	REAR TYRE Schwalbe, Smart Sam, 27.5x2.6 / 2.35	PEDALS alloy platform with reflectors
CHAINRING Narrow-Wide, 38 teeth	HANDLEBAR Moustache, ergonomic, alloy, 660mm, 30° backsweep	SIZE L
CASSETTE Shimano, CUES, CS-LG400 11-speed, 11-45T	STEM Moustache, alloy, adjustable, 110mm	COLOR Oak green metallic
CHAIN Shimano, CN-LG500, 120 links	HEADSET Acros, AZF-699, sealed bearings, internal routing, blocklock	WEIGHT 26.1 kg
SHIFTER Shimano, CUES, SL-U6000-11R, 11-speed	GRIPS SB3, Ergonomic	GVWR 160 kg
CRANKS Stronglight, aluminium, 170mm, ISI	SADDLE Selle Royal, Essenza + moderate	

XROAD 6

XR6OVL600260



WARRANTY

5 years frame and fork Moustache Bikes - 2 years
motor, battery




Find this bike online

{MOUSTACHE

XROAD 6

XR6OVL600260

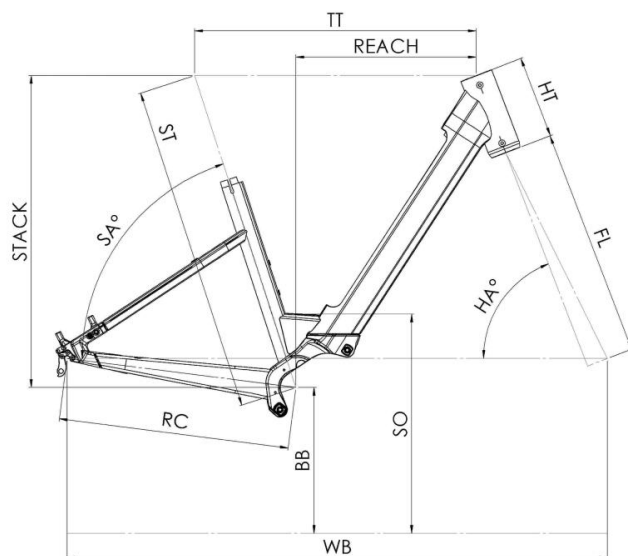

Xroad 2 / 4 / 6 Open

ST - Taille / Size	mm	390 (S)	450 (M)	510 (L)	550 (XL)
Taille utilisateur / User size	m	1,49 - 1,61	1,59 - 1,76	1,74 - 1,92	1,90 - 2,05
TT - Tube supérieur / Top tube	mm	557	580	610	645
RC - Bases / Rear center	mm	475	475	475	475
HT - Douille de direction / Headtube	mm	170	170	190	210
WB - Empattement / Wheelbase	mm	1122	1134	1166	1202
FL - Longueur de fourche / Fork length	mm	527,5	527,5	527,5	527,5
BB - Hauteur de boîtier / BB height	mm	300	300	300	300
SA - Angle de selle / Seat angle	°	70,8	70,8	70,8	70,8
HA - Angle de direction / Head angle	°	65,3	66,2	66,2	66,2
Reach	mm	320,0	342,0	365,0	394,0
Stack	mm	677	682	701	720
SO - Enjambement / Standover	mm	140	140	140	140



Find this bike online

TOUSTACHE